

UE15-SPA4

Switching Power Adaptor

15 Watt



• Technical data

Input voltage	100-240V AC
Input current	400mA
Frequency	50-60Hz
Efficiency	60% typ. at full load
Output voltage tolerance	±5%

• Environmental specification

Operation temp.	0°C to 40°C at maximum load
Storage temp.	-20°C to 60°C
Humidity	5% to 95% non condensing

• Safety specification


Safety approval	cCSAus (CSA601 and UL60601) TUV-GS (EN60950 and EN60601) CE Mark CCC (GB4943)
-----------------	--

• Reliability specification

MTBF calculation	50,000 hours at maximum load levels and an ambient temperature of 25°C (in correspondence with MIL-HDBK-217)
------------------	--

• Mechanical specification

Weight	125g
Dimensions	74.5mm x 46.5mm x 29.0mm (2.93" x 1.83" x 1.14")

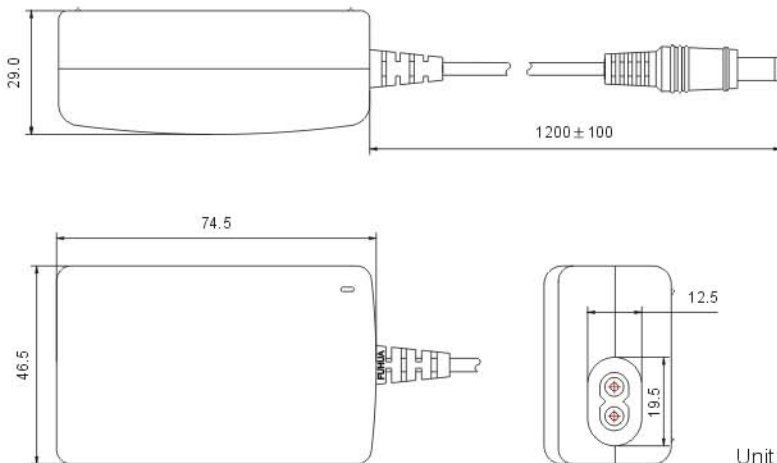

Unit:mm

Output data

Model	Voltage (V)	Current (A)	Ripple (mV)
UE15-030200SPA4	3.0	2.00	50
UE15-033200SPA4	3.3	2.00	50
UE15-036200SPA4	3.6	2.00	50
UE15-045200SPA4	4.5	2.00	50
UE15-048200SPA4	4.8	2.00	50
UE15-050200SPA4	5.0	2.00	50
UE15-055200SPA4	5.5	2.00	50
UE15-060200SPA4	6.0	2.00	100
UE15-065200SPA4	6.5	2.00	100
UE15-075180SPA4	7.5	1.80	100
UE15-080150SPA4	8.0	1.50	100
UE15-085150SPA4	8.5	1.50	100
UE15-090150SPA4	9.0	1.50	100
UE15-105130SPA4	10.5	1.30	100
UE15-120125SPA4	12.0	1.25	150
UE15-135100SPA4	13.5	1.00	150
UE15-138100SPA4	13.8	1.00	150



A000892