


KVM-1150&1170

◆ Brief Instruction

KVM-1150/1170 integrates 15" or 17" LCD, keyboard, touchpad and 1U high rack mountable kit with slide rail, is characterized by its Easy Installation Rack Mount Kit, which streamlines the rack mounting process, making it easy for a single person to accomplish in a short time. Setup is fast and easy; plugging cables into their appropriate ports is all that is entailed.

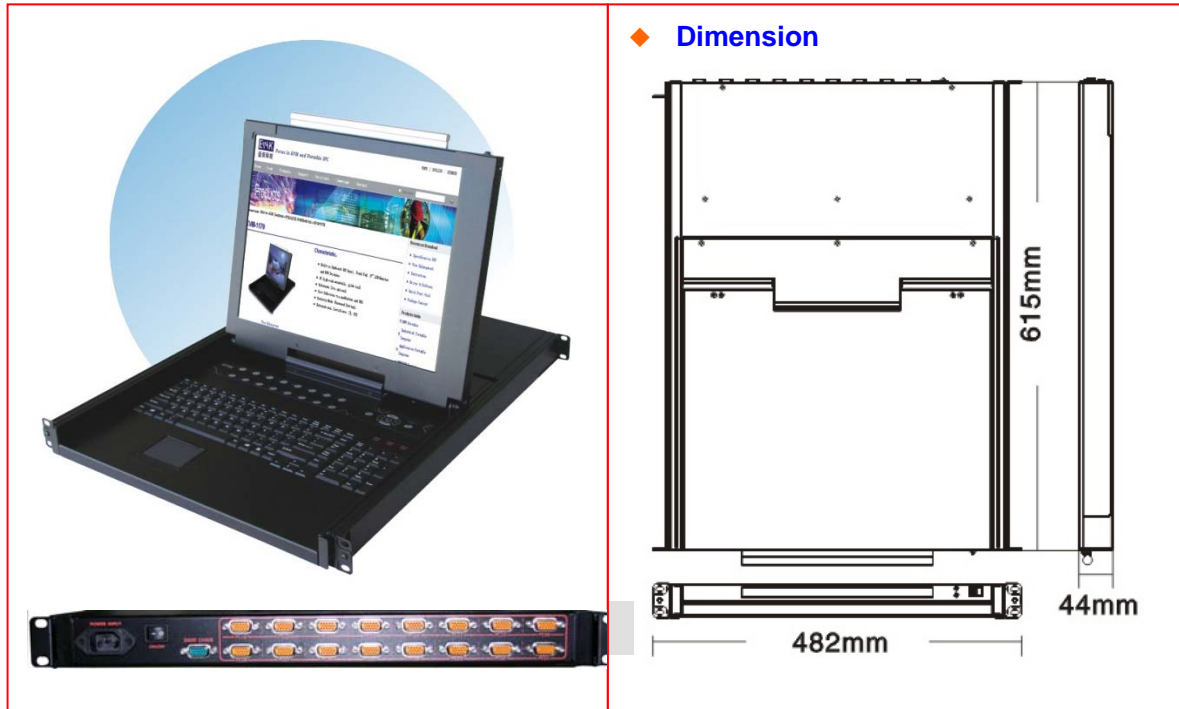

- ✚ Easy Installation Rack Mount Kit, which streamlines the rack mounting process, making it easy for a single person to accomplish in a short time
- ✚ Port Selection via pushbutton and OSD
- ✚ Daisy Chain style. More 31pcs KVM, at most 512pcs computers under management
- ✚ Security Mode (Password setting)
- ✚ Built-in Keyboard (104 keys), Touchpad
- ✚ the slide rail pushing with un-lock automatically function
- ✚ Less than 1U high rack mountable
- ✚ Support operation system: Windows 2000、Windows XP、Windows Vista、LINUX

Function		Model	KVM-1150/1170-1D	KVM-1150/1170-8D	KVM-1150/1170-16D
		Computer Connectors	Direct		1
Max			1	256 (Daisy Chain)	512 (Daisy Chain)
Connect port	Connect port		1x DB-15M	8 x DB-15F	16 x DB-15F
			1x MD-6F		
	Chain port		1 x DB-15M	1 x DB-15M	
Keyboard Mouse signal style			PS/2	PS/2	PS/2

Display OSD language		7 kinds	7 kinds	7 kinds
KVM OSD language		---	8 kinds	8 kinds
Scan interval(OSD option)		---	User Specified : 5-99 sec	
LCD	Resolution	15" LCD: 1024 x 768 ; DDC2B 17" LCD: 1280 x 1024; DDC2B		
	Contrast Ratio	15" LCD: 180cd/m ² &300: 1 17" LCD: 300cd/m ² &800: 1		
Input pressure		100V-240V 47-63Hz		
Power	15" LCD	12W		
	17" LCD	30W		
Operating Temperature		0°C ~ 50°C		
Storage Temperature		-20°C ~ 60°C		
Humidity		0% ~ 80% RH		
Material		metal		
color		black		
Weight	15" LCD	13.5Kg	13.7 Kg	13.9 Kg
	17" LCD	14 Kg	14.2 Kg	14.4 Kg
demension (L × W × H)		615x 480x 44mm (19"1U)		
the range of rack mount kit depth		615mm-1040mm		

◆ **Rack mounting demonstration**

kvm-1150&1170 installation

■ one person installation as Easy Three steps !

① Fix the slider rack mount brackets to the 19" cabinet rails



② Slide the KVM switch into the brackets



③ Mount the unit to the brackets using quick-release fastener. Then Slide it out and get to work.



www.evak.cn

◆ **Ordering information**(The specification and pictures are subject to change without notice)

- 🚩 KVM-1150-1D 15" TFT/Keyboard/Touchpad/100V-240V AC Input/1 port Switch
- 🚩 KVM-1150-8D 15" TFT/Keyboard/Touchpad/100V-240V AC Input/8 port Switch
- 🚩 KVM-1150-16D 15" TFT/Keyboard/Touchpad/100V-240V AC Input/16 port Switch
- 🚩 KVM-1170-1D 17" TFT/Keyboard/Touchpad/100V-240V AC Input/1 port Switch
- 🚩 KVM-1170-8D 17" TFT/Keyboard/Touchpad/100V-240V AC Input/8 port Switch
- 🚩 KVM-1170-16D 17" TFT/Keyboard/Touchpad/100V-240V AC Input/16 port Switch

More information ,please visit : <http://www.evak.cn>