


# SPECIFICATIONS

MODEL	KM-22A280-59-06300	RATED VOLTAGE	DC 6V	SAMPLE NUMBER	
-------	--------------------	---------------	-------	---------------	--

## OUTLINE

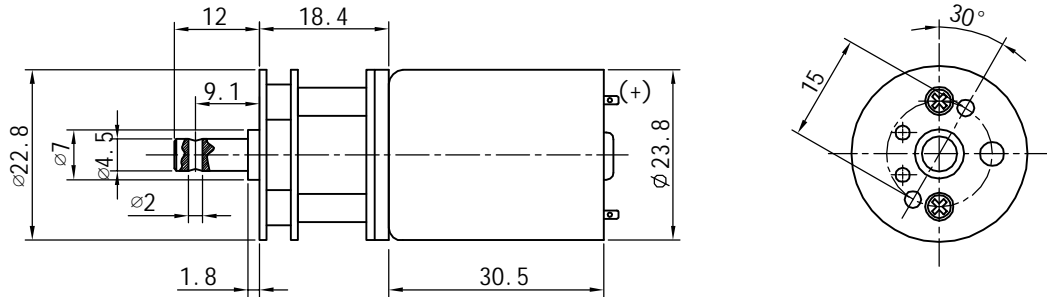

VOLTAGE	NO LOAD		ON LOAD				
	CURRENT	SPEED	CURRENT	SPEED	TORQUE	OUTPUT	EFF
V	A	rpm	A	rpm	Kg. cm	W	%
6	0.35	288.1	1.1	264.7	1.0	2.71	41.1

### REFERENCE CHARACTERISTICS

- 1 DIRECTION OF ROTATION: ANTI-CLOCKWISE WHEN VIEWING MOTOR OUTPUT SIDE WITH POSITIVE VOLTAGE APPLIED TO POSITIVE TERMINAL
- 2 NO LOAD: CURRENT:  $\leq 0.35A$
- 3 NO LOAD: SPEED: 300 RPM  $\pm 10\%$
- 4 MOTOR END PLAY:  $\leq 0.4$  MM
- 5 OPERATING TEMPERATURE RANGE:  $-10^{\circ}C \sim +60^{\circ}C$
- 6 OPERATING HUMIDITY RANGE: 20 %-90%
- 7 GO WITH MOTOR RANGE: SE30L-3050P-40HRACB 280 6V 18000rpm/min  $\pm 10\%$

CUSTOMER APPROVAL:

PREPARED BY		APPROVED BY		DATE	
-------------	--	-------------	--	------	--