


PABX Based on GSM/CDMA wireless access

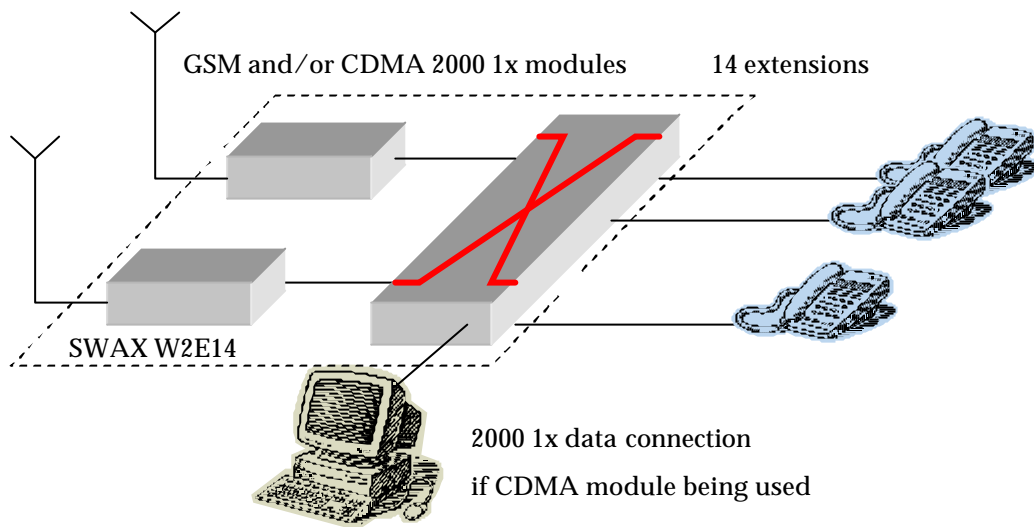

Features

- ◆ Two CDMA (450/800/1900M) and/or GSM (900/1800/1900M) wireless access modules available.
- ◆ With or without R-UIM/SIM,
- ◆ 14 Ext., 0 to 1000 meters access
- ◆ One USB Port Connected to PC for configuring system, updating software, collecting call data and accessing internet
- ◆ High gain antenna with TNC connector, fixed at the back of the box. Or can be connected to Patch Panel Antenna via long RF cable.
- ◆ Power Supply:
Internal Switch Mode Power System
Input range, 90Vac to 300Vac / 50Hz or 60Hz
An external 48V-7AH lead-acid battery can be connected to the system, acting as Backup Battery.
- ◆ Indicators
Power 1 LED
Working 1 LED, twinkling
Signal Strength 3 LEDs
- ◆ Call log record will be generated to each incoming and out going call, including Ext. number, destination number, GSM/CDMA channel number, start time and duration (in seconds); Max. 160,000 records.
- ◆ Free intercom call between Extensions
- ◆ Prefix IP code can be setup for outgoing call if ISP IP service is provided
- ◆ USB port for call log record retrieving, it will be used for account balance among extension subscribers if the terminal is used in rural area, or for internal account management
- ◆ USB port may also work for internet data connection (only if CDMA module being used and 1x data service is available in the CDMA network) Connecting PC to USB port and dial up, terminal then act as Wireless Modem, to access internet, browse web sites, edit-send-receive Email, etc.
- ◆ Caller ID Display in DTMF mode supported
- ◆ Terminal can be password protected for safety operation,
- ◆ Outgoing or incoming call limitation for each extension
- ◆ Indication-voice recording for terminal and each extension are available
- ◆ Software update is available for more services to be engaged via USB port

Functions

- ◆ Incoming call through GSM or CDMA network to one Extension or generate a call from Extension, through GSM or CDMA network to mobile or fixed phone
- ◆ According to the recorded guiding voice, the remote caller dials the target extension number to create a voice connection