

UE02L4-SPCC

Switching Power Charger 2.24 Watt

• Technical data

Input voltage	100-240V AC
Input current	120mA
Frequency	50-60Hz
Output voltage tolerance	±5%
Low standby power	0.3W Max.

• Environmental specification

Operation temp.	0°C to 40°C at maximum load
Storage temp.	-20°C to 60°C
Humidity	5% to 95% non condensing

• Safety specification


Safety approval	CCC (GB4943)
-----------------	--------------

• Reliability specification

MTBF calculation	50,000 hours at maximum load levels and an ambient temperature of 25°C (in correspondence with MIL-HDBK-217)
------------------	--

• Mechanical specification

Weight	62g
Dimensions	61.0mm x 24.0mm x 33.8mm (2.4" x 0.94" x 1.33")

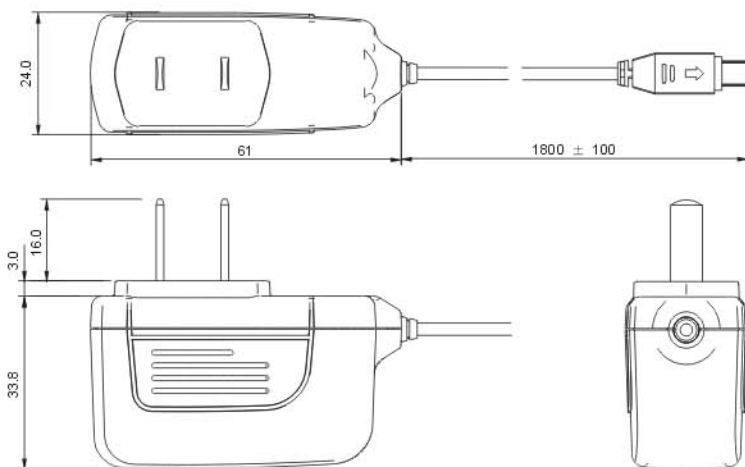

Unit:mm



東莞市石龍富華電子有限公司

中國廣東省東莞市石龍鎮新區黃洲祥龍路富華電子工業園


Fuhua Electronic Industrial Park, Xianglong Road, Huangzhou, New Town District,
Shilong Town, Dongguan, Guangdong Province, China. 523326
Tel: (86) 769 86022222 Fax: (86) 769 86023333
www.fuhua-cn.com E-mail: fuhua@fuhua-cn.com



Output Data

Model	Voltage (V)	Current (A)	Ripple (mV)
UE02L4-050YYSPCC	5.0	0.05-0.40	200
UE02L4-051YYSPCC	5.1	0.05-0.40	200
UE02L4-052YYSPCC	5.2	0.05-0.40	200
UE02L4-053YYSPCC	5.3	0.05-0.40	200
UE02L4-054YYSPCC	5.4	0.05-0.40	200
UE02L4-055YYSPCC	5.5	0.05-0.40	200
UE02L4-056YYSPCC	5.6	0.05-0.40	200

YYY: 005-040 stands for current: 0.05A-0.40A

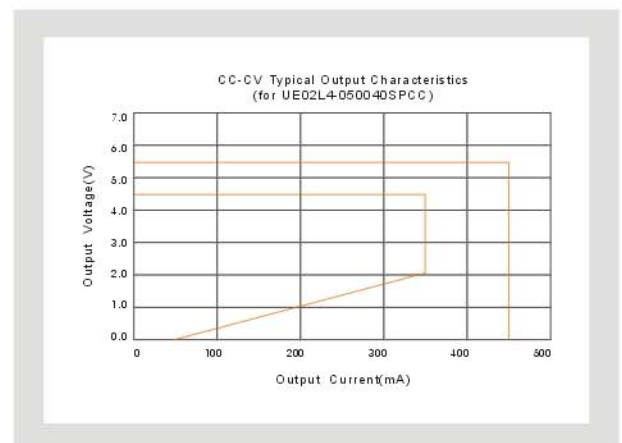

Fuhua Electronic (HK) Co., Ltd.

香港九龍彌敦道27-33號良士大廈9樓H室

Flat H, 9/F., Alpha House, 27-33 Nathan Road,
Kowloon, Hong Kong.
Tel: (852) 27391666 Fax: (852) 27395999
www.fuhua.com.hk E-mail: fuhua@fuhua.com.hk