


SL M35 | Product Specifications



■ This type of motor is designed by international advanced technology, which has high techniques, stable and reliable performance, it is widely used on intermediate and small curtain, screen and awning etc. which the load requirement is less than 25kg.

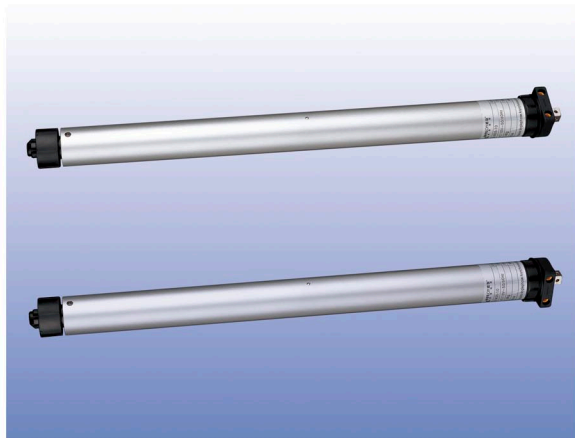

SL M35 Characteristics

Model	SS35-3/26	SS35-6 /12	SS35-10 /12
Voltage (V)	220/230V 110/120V 50/60HZ	220/230V 110/120V 50/60HZ	220/230V 110/120V 50/60HZ
Current (A)	0.6/1.35	0.6/1.35	0.7/1.45
Power (W)	135/140	135/140	145/150
Nominal speed (rpm)	26	12	12
Nominal torque (N.m)	3	6	10
Work time (min)	4	4	4
DBA (db)	< 45	< 45	< 45
Insulation level	B	B	B
Protection	Ip44	Ip44	Ip44
Tube diameter (mm)	35	35	35
Overall size (mm)	Φ 35 × 580	Φ 35 × 580	Φ 35 × 580
Weight (kg)	1.6	1.6	1.6
Carton size	610 × 70 × 70	610 × 70 × 70	610 × 70 × 70
CTNS	620 × 230 × 300	620 × 230 × 300	620 × 230 × 300