


RECOMMENDED
CABLE STRIPPING DIM'S

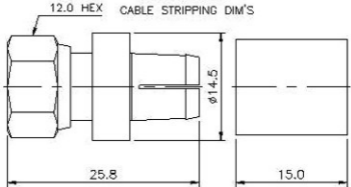

F series are economically priced connectors specially designed for use with NTSC TV ANTENNA, MATV, and satellite communication applications.

Countries using the NTSC system include: The Bahama Islands, Canada, Central America, Japan, Korea, Mexico, Taiwan, The Phillipines, the U.S.A.

Specifications

Electrical		
Impedance		75 ohm
Frequency Range		0 - 2 GHz
Working Voltage		250 VRMS max.
Dielectric Withstanding Voltage		500 VRMS min.
VSWR		1.35 max
Contact Resistance	Center Contact	5 Milliohms Max.
	Outer Contact	1 Milliohms Max.
Insulator Resistance		1000 Megohms min.

Material		
Parts Name	Material	Finish
Body, Metal Parts	Brass per QQ-B-626	Nickel
Center Contacts	Plug: Brass per QQ-B-626	Nickel or Gold
	Jack: Phosphor Bronze per QQ-B-750 or Brass per QQ-B-626	Nickel or Gold
Insulators	Teflon, Delrin, PBT	None
Crimp Ferrules	Annealed copper	Nickel
Clamp Gaskets	Silicone rubber	None

NOTE 1: Other Material/Finish is Available on Request

