
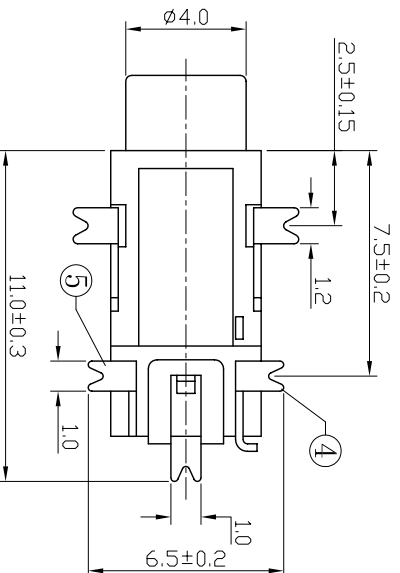


### SCHEMATIC

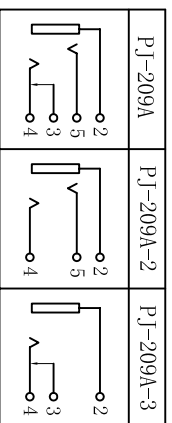

### SPECIFICATION

1. Rating : DC 30V 0.5A;
2. Contact resistance:  $\leq 0.03\Omega$ ;
3. Insulation resistance:  $\geq 100M\Omega$  (DC250V) ;
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force 3-20N;
6. Life test: 5,000 cycles.

5	SPRING PIECE	1	PHOSPHOR BRONZE	Au/Ag-Plating
4	SPRING PIECE	1	PHOSPHOR BRONZE	Au/Ag-Plating
3	CURVE PIECE	1	BRASS	Au/Ag-Plating
2	CONTACT FOOT	1	PHOSPHOR BRONZE	Au/Ag-Plating
1	HOUSING	1	PA46	
UNIT:MM		QTY	MATERIAL	PLATING
TYPE:		PHONE JACK		
MODEL NO:		PJ-209A		
PAPER NO: A4		PAGE 1 OF 1		VER
TOLERANCE		ANGLES		SCALE
± 0.15		± 1.5°		4:1
				1
DESIGNER BY:				
CHECK BY:				
APPROVED BY:				

