

UE03L-SPAZ

Switching Power Charger 3.25 Watt



• Technical data

Input voltage	100-240V AC
Input current	100mA
Frequency	50-60Hz
Output voltage tolerance	±5%
Low standby power	0.3W Max.

• Environmental specification

Operation temp.	0°C to 40°C at maximum load
Storage temp.	-20°C to 60°C
Humidity	5% to 95% non condensing

• Safety specification

Safety approval	TUV-GS (EN60950) ENEC (EN60950) cULus (UL60950)
-----------------	---


• Reliability specification

MTBF calculation	50,000 hours at maximum load levels and an ambient temperature of 25°C (in correspondence with MIL-HDBK-217)
------------------	--


• Mechanical specification

Weight	60g (with AC plug for China, USA, Japan) 67g (with AC plug for EU)
--------	---


Dimensions	EU: 62.0mm x 21.0mm x 47.2 mm (2.45" x 0.83" x 1.86") UL: 62.0mm x 21.0mm x 37.5mm (2.45" x 0.83" x 1.48")
------------	---

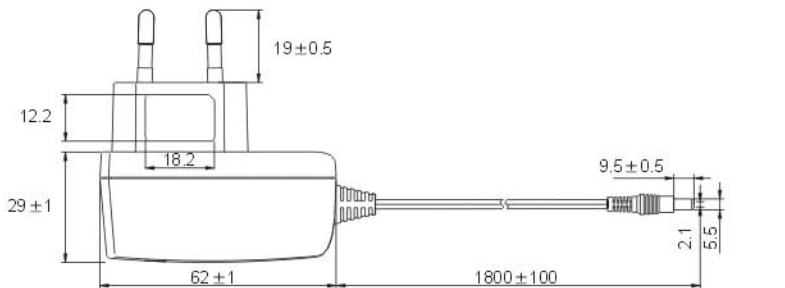

EU

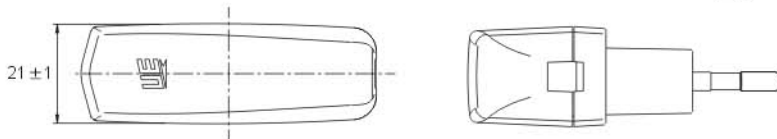

UL

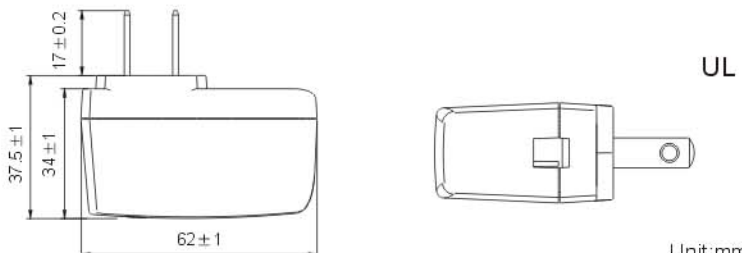

Unit:mm

Output data

Model	Voltage (V)	Current (A)	Ripple (mV)
UE03L-050YYYSPAZ	5.0	0.01-0.65	200

YYY: 001-065 stands for current: 0.01A-0.65A

Z: C - AC Plug for China
U - AC Plug for USA
V - AC Plug for Europe

