



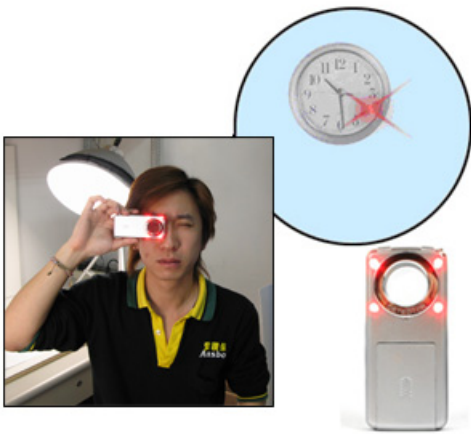


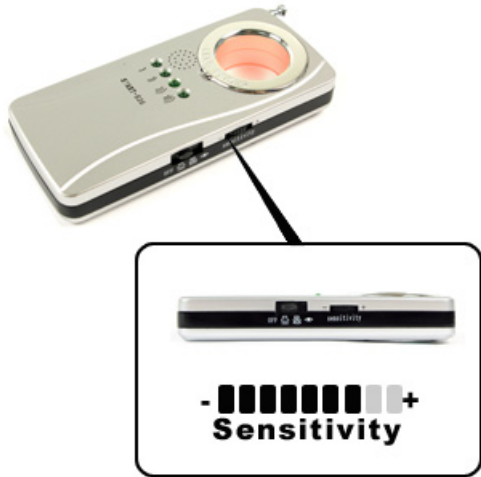
## Function instruction..

- It has function of mine-shoot detecting. It may detect all wired & wireless cameras through view-windows with naked eye.
- It has frequency detecting range (1MHz—6.5GHz).
- It may detect effectively such devices as monitor 、telephone wiretap 、digital wiretap 、tracker 、car wiretap 、wireless pinhole camera 、wired camera 、malpractice- device in betting & gambling room 、wiring radiation.
- It has function of auto detecting. You can carry it with you at any moment. When there is monitor 、pinhole camera 、blusting device in betting & gambling room 、etc., Then it will advise you the risk by shaking strength & feebleness automatically.
- It has more types of detecting mode: 1. IR laser detecting; 2. Vibrating alarm detecting; 3. Beeping detecting; 4. LED light flickering detecting.
- It has real display LED number for strong & feeble signal, so you can find out electric source even fast.
- It has sensitivity adjustment (may enhance sensitivity to pull large detecting range or depress sensitivity to shorten detecting range), so you can find out electric source even fast.




## Specification..

Distance of mine-shoot detecting camera	10cm-20m(You can distinguish red light flickering with naked eye)
Distance of electric wave detecting camera	5cm-10m(Distance is subject to transmission power of camera) Power: 50mv-200mv Detecting distance: 30-50cm Power:300mv-600mv Detecting distance:100-200cm Power:800mv-1200mv Detecting distance:300-800cm
Mode of detecting induction	1 、When you see red laser flicker with your naked eye through the view-windows, then it indicates that you find objective. 2 、It indicates that the objective is detected when the mainframe shakes. 3 、It indicates that the objective is detected when there is voice indication coming from mainframe. 4 、When there is LED signal of strength and feebleness, it indicates that you may find out objective directly.
Mode of auto detecting induction	You can carry it with you at any moment. When there is monitor 、pinhole camera 、blusting device in betting & gambling room 、etc., Then it will advise you the risk by shaking strength & feebleness automatically.
Electric wave sensitivity adjustment	No-sect type adjust LED light display (may enhance sensitivity to pull large detecting range or depress sensitivity to shorten detecting range), and you can find out electric source even fast.
Power supply	1.5V AAAX2
Current consumption	8mA
Detection mine-shoot wave length	920nm
Incepting frequency range	1MHz- 6500MHz
Optic lens	IR ray specially filtrated lens
Material	ABS
Dimension	108mmX48mmX18mm
Net Weight / Gross Weight	52g / 297g

# Speciality..

	
<p>When you see red laser flicker with your naked eye through the view-windows, then it indicates that you find objective.</p>	<p>When there is LED signal of strength and febleness, it indicates that you may find out objective directly.</p>
	
<p>It has function of auto detecting. You can carry it with you at any moment. When there is monitor 、 pinhole camera 、 blusting device in betting &amp; gambling room 、 etc., Then it will advise you the risk by shaking strength &amp; febleness automatically</p>	<p>Electric wave sensitivity adjustment (may enhance sensitivity to pull large detecting range or depress sensitivity to shorten detecting range), so you can find out electric source even fast.</p>

# Complete set..

		
<p>Laser wireless multifunctional detector x1</p>	<p>Manual x1</p>	<p>Box x1</p>