





# XGB-5XX



MODEL	VOLTAGE	REDUTION RATIO	CURRENT (A)	OUTPUT SPEED (rpm)	RATED TOLERANCE TORQUE (Kgf.cm)	RATED LOAD SPEED (rpm)	EFFICIENCY	L(mm)	H(mm)
XGB-540S-19230	12.0V	1/64	0.12	53	4.7	43	66%	26.0	50.0
XGB-545S-4023	12.0V	1/30	1.03	610	5.5	520	73%	24.0	50.0
XGB-555SP-4040	12.0V	1/64	0.35	120	3.5	103	66%	26.0	57.0
XGB-5412SP-06350	220V	1/30	0.04	360	3.0	292	73%	24.0	50.0
XGB-5512SP-07280	220V	1/270	0.02	40	22.0	32	59%	29.0	57.0
XGB-5512SP-08250	220V	1/150	0.03	78	25.2	64	59%	29.0	57.0

DIRECTION OF ROTATION

UNIT: MILLIMETERS

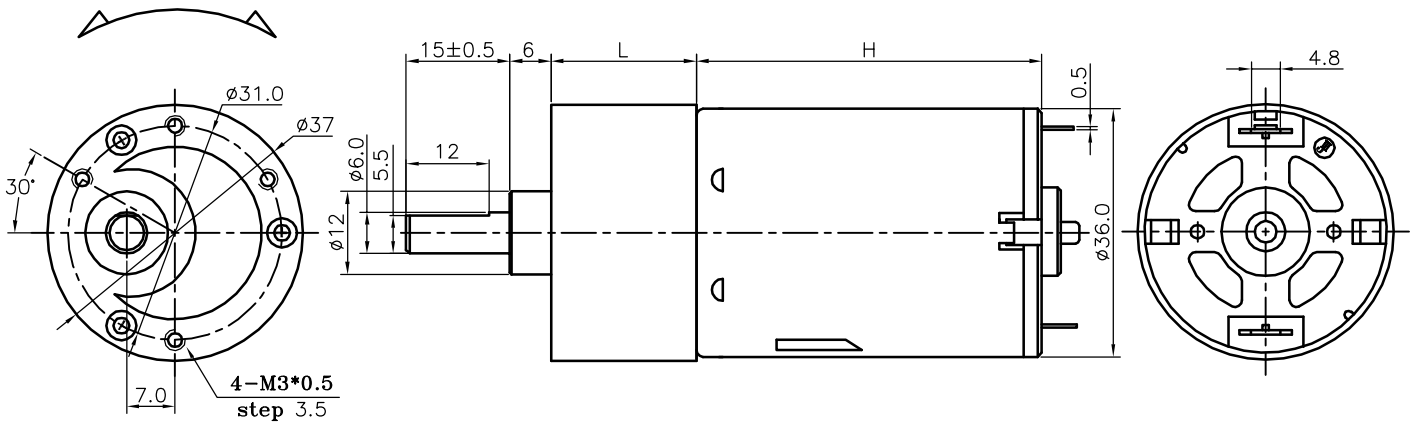

WEIGHT:260~330g(APPROX)