





CONTACT CLIP

## 2.54mm IC Socket

### SPECIFICATIONS

Insulator: Black glass filled polyester PBT+30%GF  
 Flammability: UL94V-0  
 Sleeve: Brass CuZn 36pb3(36000)  
 Contact clip(4 finger): Beryllium copper (C17200)  
 Mating pin $\phi$ : 0.40 to 0.56mm  
 Forces: (polished steel gauge  $\phi$ 0.43mm)  
 -Insetion: 3.DN typ. -Withdrawal: 1.5N typ.  
 Mechanical life :min 100 cycles  
 Rated current:1.0A  
 Contact resistance: max 10m $\Omega$   
 Dielectric strength :min 1000V<sub>RMS</sub>

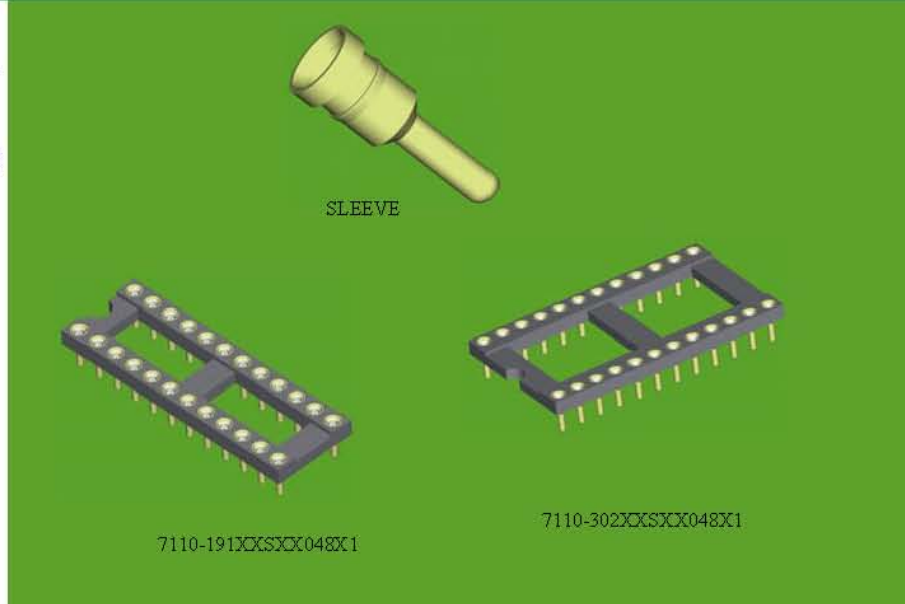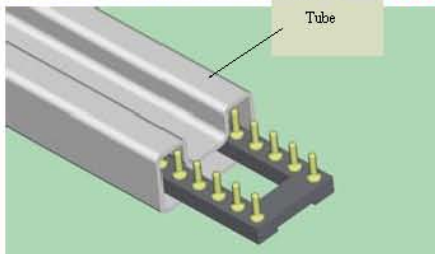

## 7110-19 X XX S XX 048 X 1


ROW OF PITCH  
1.7.62 2:15.24

NO.OF PINS  
6~50

CONTACT PLATING  
 S0:1u" Gold/Tin S4:15u"Gold/Tin  
 S1:3u" Gold/Tin S5:30u"Gold/Tin  
 S2:5u" Gold/Tin S6:20u"Gold/Tin  
 S3:10u"Gold/Tin S7:Tin

PACKING  
 A:Tray T:Tube  
 R:Tape & Reel  
 D: PE Bag

PART NO.	NO. OF POSITIONS	DIM "A"	ROW PITCH DIM "B"	DIM "C"
7110-19106SXX048X1	06	7.60	7.62	10.10
7110-19108SXX048X1	08	10.10	7.62	10.10
7110-19110SXX048X1	10	12.60	7.62	10.10
7110-19114SXX048X1	14	17.70	7.62	10.10
7110-19116SXX048X1	16	20.30	7.62	10.10
7110-19118SXX048X1	18	22.80	7.62	10.10
7110-19120SXX048X1	20	25.30	7.62	10.10
7110-19122SXX048X1	22	27.80	7.62	10.10
7110-19124SXX048X1	24	30.40	7.62	10.10
7110-19128SXX048X1	28	35.50	7.62	10.10
7110-19224SXX048X1	24	30.50	15.24	17.70
7110-19228SXX048X1	28	35.50	15.24	17.70
7110-19232SXX048X1	32	40.60	15.24	17.70
7110-19236SXX048X1	36	45.70	15.24	17.70
7110-19240SXX048X1	40	50.80	15.24	17.70
7110-19242SXX048X1	42	53.30	15.24	17.70
7110-19248SXX048X1	48	60.90	15.24	17.70
7110-19248SXX048X1	50	63.50	15.24	17.70

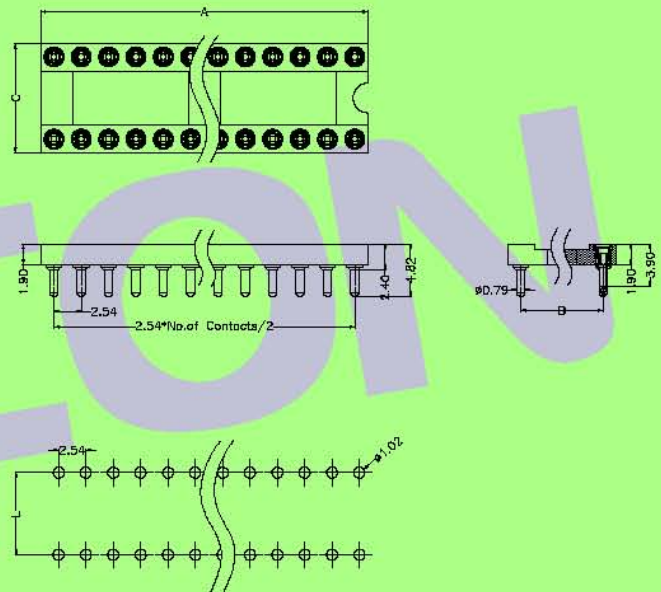

Recommended P. C. B Layout (top side)

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920  
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418