


T/NO.			
-------	--	--	--

REVISIONS		DESCRIPTION	DATE	APPROVED
REV				

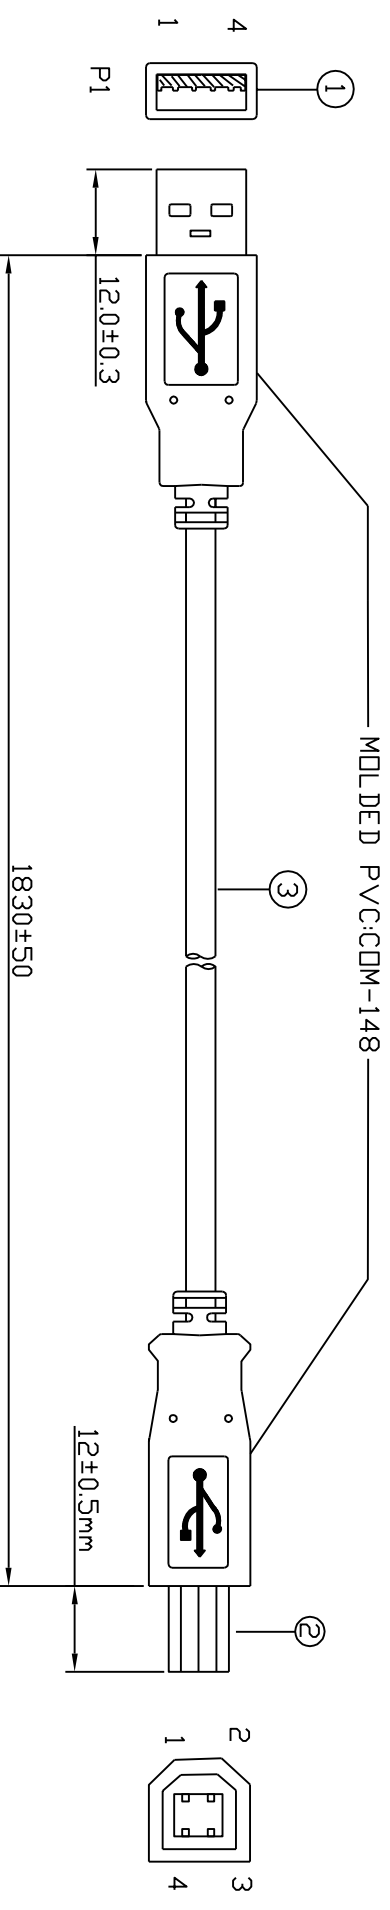

ELECTRONIC TEST:

a. OPEN/SHORT/INTERMITTENCE 100% TEST.

b. INSULATION RESISTANCE: 5MΩ (MIN)at DC 300V/10ns.


c. CONDUCTIVE RESISTANCE: 2Ω (MAX).

NOTES:

ALL COMPONENTS ARE ROHS COMPLIANT

SPECIFICATION

1. CONN: USB A-TYPE 4PIN MALE WHITE SOLDER G/F
 2. CONN: USB B-TYPE 4PIN MALE WHITE SOLDER G/F
 3. WIRE: USB REV 2.0 UL CM 2725 28AWG*1P+28AWG*2C
- AL-FOL/MYLAR+DRAIN WIRE+BRAID(16*4*0.1mm)
- COLOR: CDM-148 DD: 4.0±0.15mm L=1830±10mm

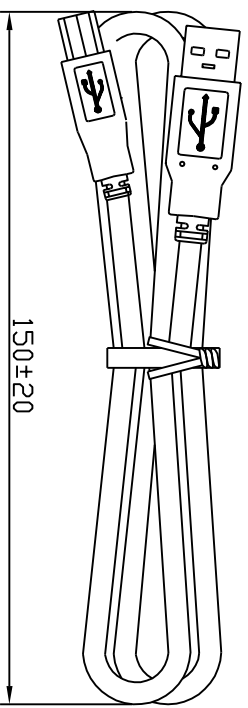

PACKING METHOD

Q'TY

WIRE CONNECTION

P1	Color	P2
1	Red	1
2	White	2
3	Green	3
4	Black	4
Shell	Braid	Shell

		TITLE		PROJECTION:	
		USB A TO B CABLE ASS'Y			
ELECTRONICS CO.LTD S.		PART NUMBER		UNITS:	
DRAWN BY		DRAWING NUMBER		SCALE:	
CHECKED BY		REV.		SIZE:	
APPROVED BY		TOLERANCES UNLESS NOTED:		SHEET:	
DATE		DATE		1/1	
DATE		DATE		A4	
DATE		DATE		NONE	
DATE		DATE		S0	
DATE		DATE		±0.15	
DATE		DATE		±0.10	
DATE		DATE		±0.05	
DATE		DATE		x.x	
DATE		DATE		x.xx	