T/NO.		

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

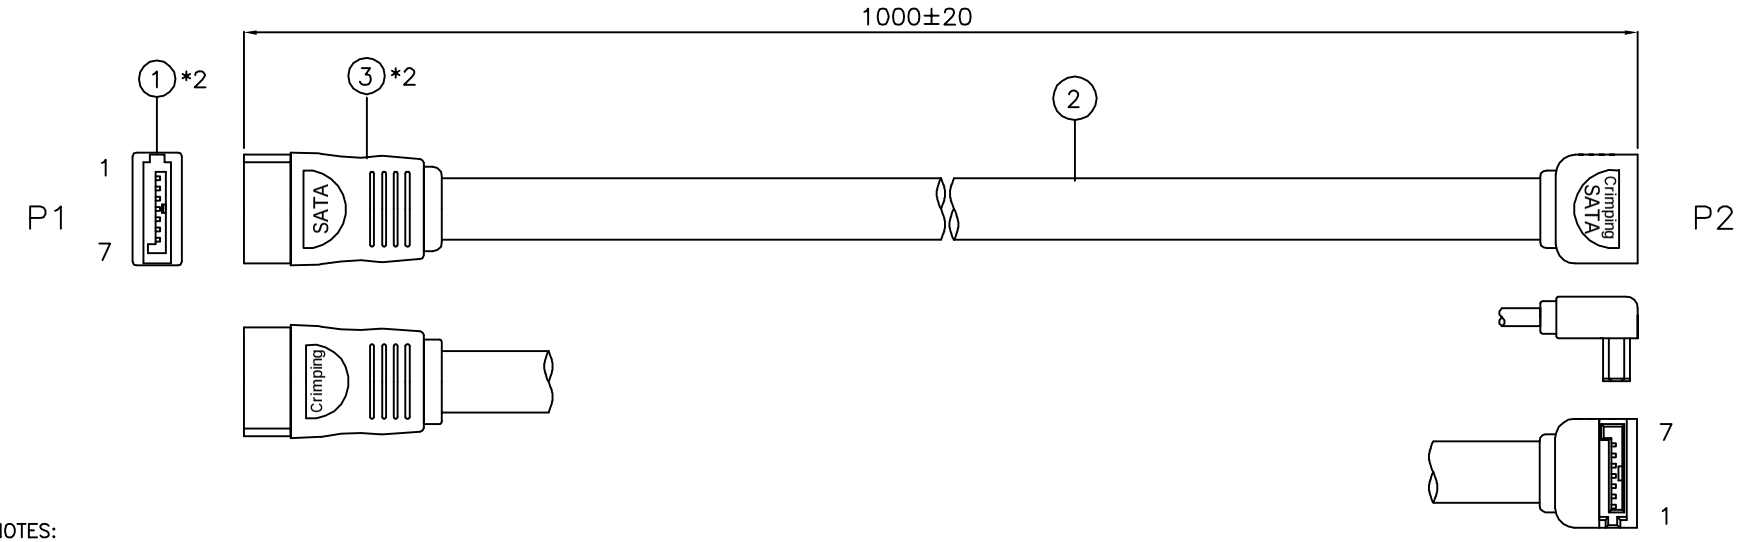

NOTES:
ALL COMPONENTS ARE RoHS COMPLIANT

ELECTRONIC TEST CONDITION:
100% OPEN SHORT&MISWIRE TEST
CONDUCTIVE RESISTANCE:2 OHMS/MAX
INSULATION RESISTANCE:100 OHM/MIN AT DC 500V

Wire connection

P1	Color	P2
1	Drain	1
2	Pair	2
3		3
4	Drain	4
5	Pair	5
6		6
7	Drain	7

Description	Q'TY
1.CONNECTER:SERIAL SATA 7P(FEMALE) STRAIGHT CRIMP TYPE PLASTIC :PBT UL94-0 BLACK PIN CONTACTS:GOLD FLASH	2ps
2.WIRE:UL21149 26AWG*2P 28AWG*4C+AL-FOIL/MYLAR O.D=2.2*7.6±0.15mm JACKET COLOR:Red L=990±10mm	1ps
3.PVC MOLDED:45P PVC BLACK	10g

Comlink ELECTRONICS CO.LTD S.

DRAWN BY FLY	DATE Jun.10.06	TITLE S-ATA CABLE ASSEMBLY	PROJECTION:
CHECKED BY	DATE	PART NUMBER	UNITS: mm
APPROVED BY	DATE	DRAWING NUMBER / REV. S0	SCALE: NONE
		TOLERANCES UNLESS NOTED: X. ±0.15, X.X ±0.10, X.XX ±0.05	SIZE: A4
			SHEET: 1/1

PDF created with pdfFactory trial version www.pdffactory.com