





**Omnidirectional
CZ034F Series (ø6X2.7)**



CZ034F



CZ034FP



CZ034FS



unit : mm

PART NO. TABLE


Sensitivity (0dB=1V/pa, 1KHz)	(Vs=2.0V, RL=2.2KΩ)		
	Solder type	Pin type	Solderless type
-40 ± 2dB	CZ034F402	CZ034FP402	CZ034FS402
-42 ± 2dB	CZ034F422	CZ034FP422	CZ034FS422
-44 ± 2dB	CZ034F442	CZ034FP442	CZ034FS442
-46 ± 2dB	CZ034F462	CZ034FP462	CZ034FS462

Specification

- 1) Sensitivity : As part no. table
- 2) Directivity: Low impedance
- 3) Impedance : Max.500uA
- 4) Current consumption : 2.0V
- 5) Standard operation voltage : Within-3dB at 1.5V
- 6) Sensitivity reduction : More than 58dB
- 7) S/N ratio :

Schematic Circuit

(Test Condition : As part no. table)

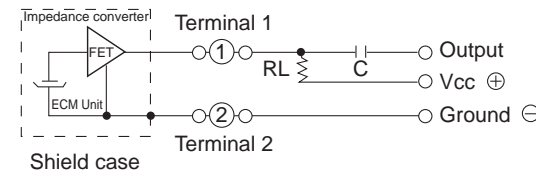

Typical Frequency Response

