


T/NO.			
-------	--	--	--

REVISIONS		DATE	APPROVED
REV	DESCRIPTION		

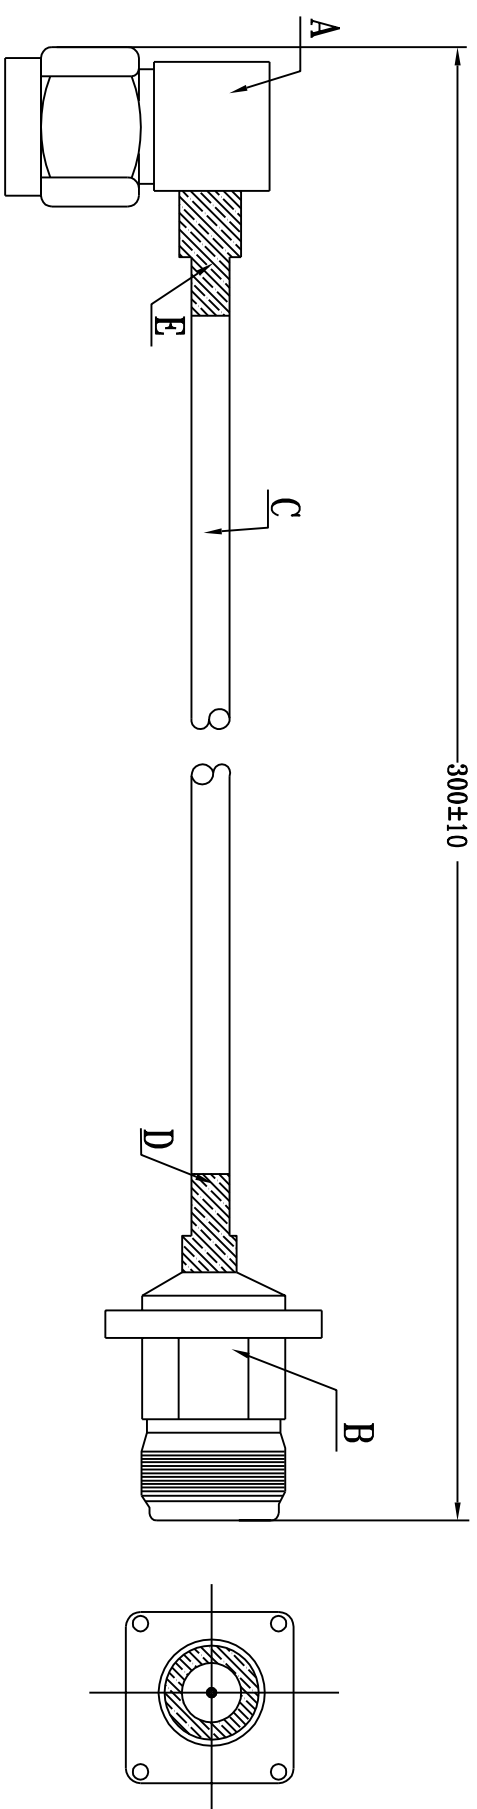

Characteristic Request:

1. Impedance: $50 \pm 5 \Omega$
2. Voltage standing-wave ratio: $< 1.2 (3G)$
3. Electrostatic capacity (pf/ft) : 29.30 Working voltage: 335V Operating Temp: $-40 \sim +80$
4. Attenuation (dB/M) :

100Mhz	400Mhz	1Ghz	3Ghz	5Ghz	10Ghz
---	0.26	0.40	0.73	1.1	1.49

SPECIFICATION

Q'TY

- A. CONNECTOR: SMA M 90° 50 Ω SMAJWB3 CNT P/N: SMA2111002
- B. CONNECTOR: N F 180° 50 Ω HLADA P/N: N-KFB3
- C. CABLE: RC402/U 50 Ω OD=4.10MM L=300 \pm 5mm
- D. SHR TUBE: $\phi 5.0 \times 20$ mm Ordinary
- E. SHR TUBE: $\phi 5.0 \times 10$ mm Ordinary

Comlink		ELECTRONICS CO.,LTD S.		TITLE		PROJECTION:	
DRAWN BY Zhiyu.yu		DATE 2006-6-12		PART NUMBER RF CABLE ASSEMBLY		UNITS:	
CHECKED BY ---		DATE ---		DRAWING NUMBER N-SMA CABLE ASSEMBLY		SCALE:	
APPROVED BY Hunter.yan		DATE 2006-6-12		TOLERANCES UNLESS NOTED: X.X, X.XX, X.XXX		SHEET:	
				±0.15 ±0.10 ±0.05		SIZE: A4	
				REV. A0		SCALE: NONE	
				REV. A0		SHEET: 1/1	