

OP37AS

Programmable Operator Panel




General Specifications:


- Screen Pixel: 192 × 64
- Display Size: 3.7" LCD
- User Memory: 1MB Flash, 1KB SRAM
- Expected Bulb Life: 20,000 Hours
- Function Keys: 10
- Numeric Keys: 10
- Color: STN LCD with Backlight
- Screen Saver: Set by Software
- Display Brightness: 60 nits
- Communication Port: RS 232 / RS 485
- Real Time Clock: Yes
- Power Input: 24VDC
- Power Consumption: 4W
- Operation Temperature: 0°C ~ 50°C
- Storage Temperature: -10°C ~ 60°C
- Withstand Voltages: AC1000V-10MA per minute (Between Signal and Ground)
- Noise Resistance: 1000Vp-p noise voltage
- Anti-Vibration: 10-25Hz (X, Y, Z each direction 2G every 30 minutes)
- Weight: 1 lb
- Relative Humidity: 20 ~ 85% non-condensing
- IP 65F

Dimensions:


1. Overall Dimensions

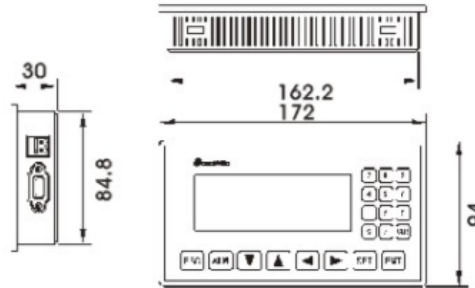

2. Mounting Dimensions

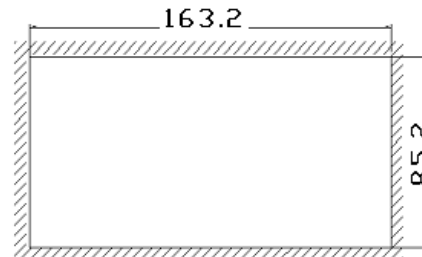

3. Port Location

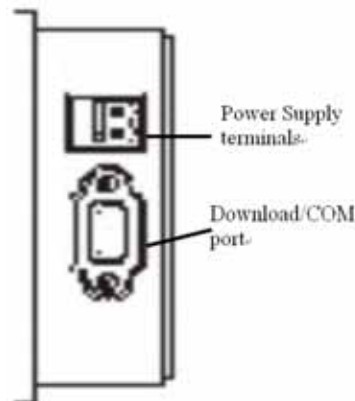

Environmental Requirements

Keep far away from corrosive gases or dusts, or chemicals

Agency Approvals: CE