


R (Z) 175B/R (Z) 180B/R180AM ●●●●●●●●●●

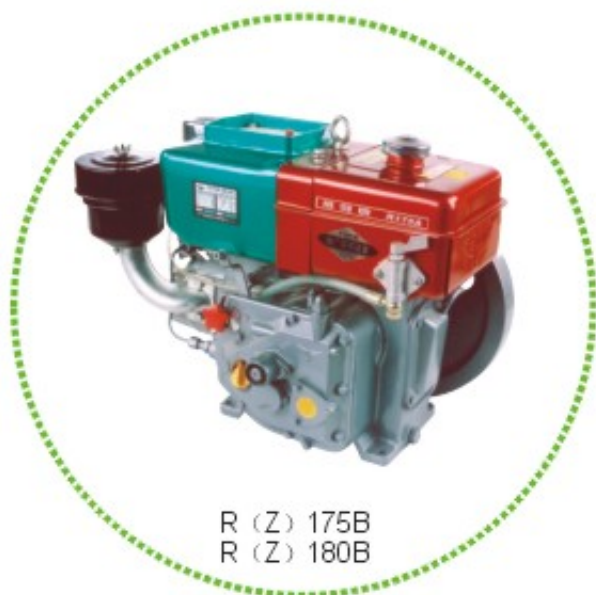

Model	R175B	RZ175	R180B	RZ180	R180AM
Type	Single cylinder, horizontal, 4-strokes				
Combustion system	Swirl combustion chamber	Direct injection	Swirl combustion chamber	Direct injection	Preheated
Bore x Stroke (mm×mm)	75×80		80×80		
Piston exhaust volume(L)	0.353		0.402		
Compression ratio	22	18	22	18	22
Rated output/rpm (KW/HP/r/min)	4.41/6/2600		5.15/7/2600		
Max output/rpm (KW/HP/r/min)	4.85/6.6/2600		5.67/7.7/2600		
Fuel consumption (g/kw·h)	≤280.2	≤264	≤278.8	≤260	≤278.8
Oil consumption (g/kw·h)	≤4.76		≤4.08		
Capacity of fuel tank(L)	4		5		
Cooling system	Hopper				
Starting system	Hand cranking				Electric starting
Net weight(Kg)	≤60		≤70		