





**Noise Cancelling
ø6X5)
CZ034GN(ø9.7X5.2)**



CZ034DN



CZ034GN



unit : mm


PART NO. TABLE		
Sensitivity (0dB=1V/pa, 1KHz)	(Vs=1.5V, RL=680Ω)	
	CZ034DN	CZ034GN
-47 ± 4dB	CZ034DN474	CZ034GN474
-51 ± 4dB	CZ034DN514	CZ034GN514

Specification

- 1) Sensitivity : As part no. table
- 2) Directivity:
- 3) Impedance : Low impedance
- 4) Current consumption : Max.500uA
- 5) Standard operation voltage : 1.5V
- 6) Sensitivity reduction : Within-3dB at 1V
- 7) S/N ratio : More than 58dB

Schematic Circuit

(Test Condition : As part no. table)

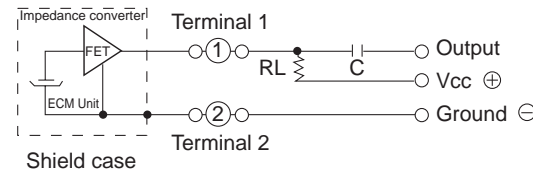

Typical Frequency Response

