客戶:	
確認:	

REV. 更改	DESCRIPTION 說明	ENG. 修改人	APPROVE. 核准
2	修改出口軸外經	汪紅齊 06.03.25	

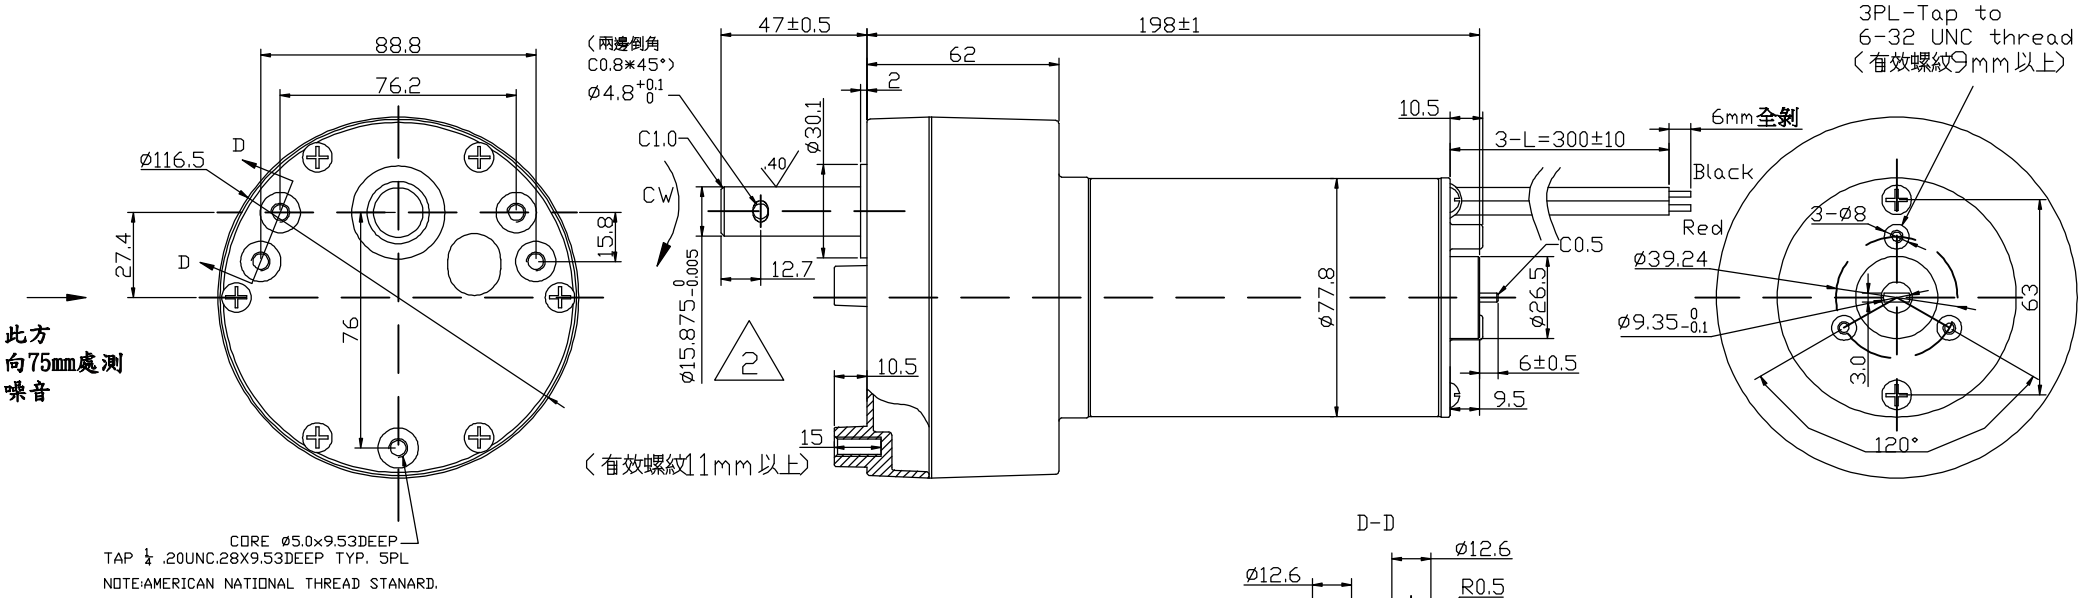



Specification:

1.Voltage:DC12 V
2.At No-load(motor/cw/ccw,2 minutes later):
  Speed:5600±350RPM Current:5.5A down
3.At On-load(175 inch pounds/202Kg.cm):Current:30A down
4.Out shaft speed:5600±350/59.4(i)=94.3±5.9RPM
5.Don't lock motor rotor
6.Direction of rotation:CW
  When viewing gearbox outshaft side with positive voltage
  applied to red lead wire
7.Lead wire:14AWG,UL&CSA Approved
8.Start Voltage: 6V down(25°C)
9.High pot Test: 1000V/5mA/1s
10.Noise(enviroment noise 55dB below,75mm distance)
  At No-load:75dB below
  At On-load:84dB below

	MATERIAL: 材質	Chuang Yang Enterprise Co., Ltd.
	TOLERANCES: 未注公差 ±0.1	TITLE: 名稱 QZ P1D MOTOR
該部品需符合環保標準	FINISH: 處理 鍍鋅	SCALE. 比例 FULL FIT / CHKD. 校對
REV: 2	UNIT: 單位 mm	APPD. 審核 / DR. 製圖 汪紅齊 2006.03.25
E-FILE 電子檔 E-QZD4054CRG000-A-2	INTENDED USE: CYC-DC5440	DWG NO. 圖號 QZD4054CRG000 1/1

PDF wurde mit pdfFactory-Prufversion erstellt. www.context-gmbh.de