


UE04L1-SPAZ

Switching Power Adaptor
4.16 Watt

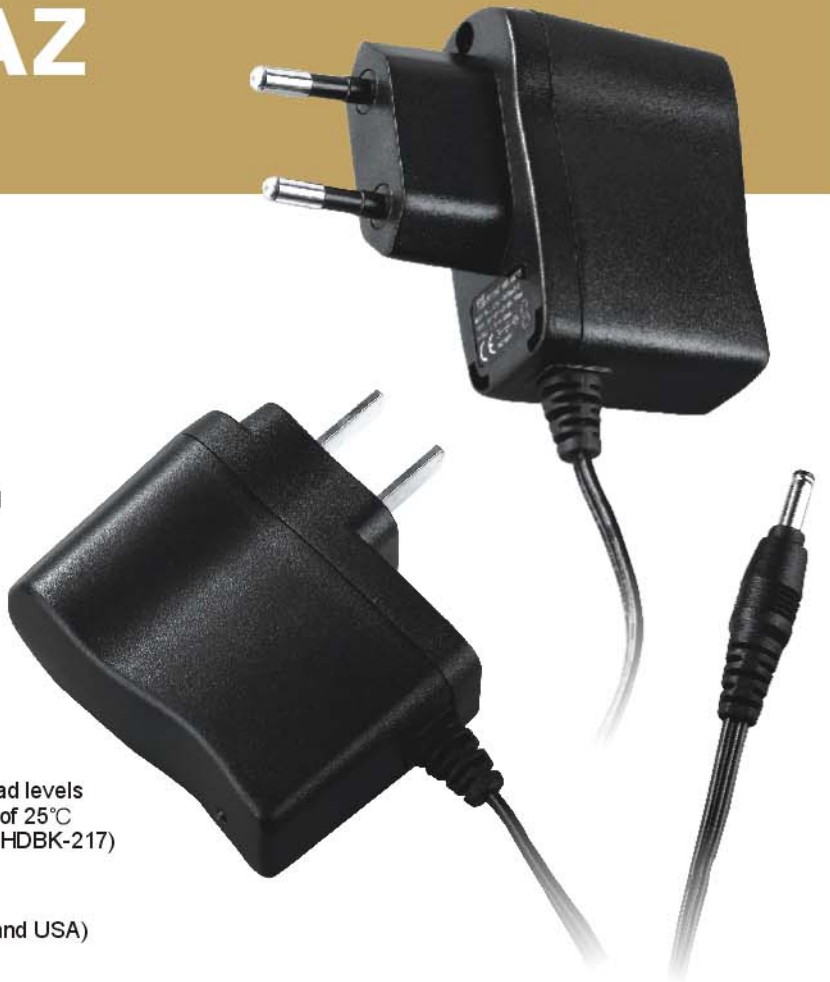

• Technical data

Input voltage	100-240V AC
Input current	200mA
Frequency	50-60Hz
Output voltage tolerance	±5%
Low standby power	0.5W Max.
LED indicator	red

• Environmental specification

Operation temp.	0°C to 40°C at maximum load
Storage temp.	-20°C to 60°C
Humidity	5% to 95% non condensing

• Safety specification

Safety approval	cULus (UL60950) CE Mark CCC (GB4943)
-----------------	--


• Reliability specification

MTBF calculation	50,000 hours at maximum load levels and an ambient temperature of 25°C (in correspondence with MIL-HDBK-217)
------------------	--

• Mechanical specification

Weight	62g (with AC plug for China and USA) 69g (with AC plug for EU)
--------	---

Dimensions	58.0mm x 25.0mm x 41.8mm (2.28" x 0.98" x 1.65")
------------	---

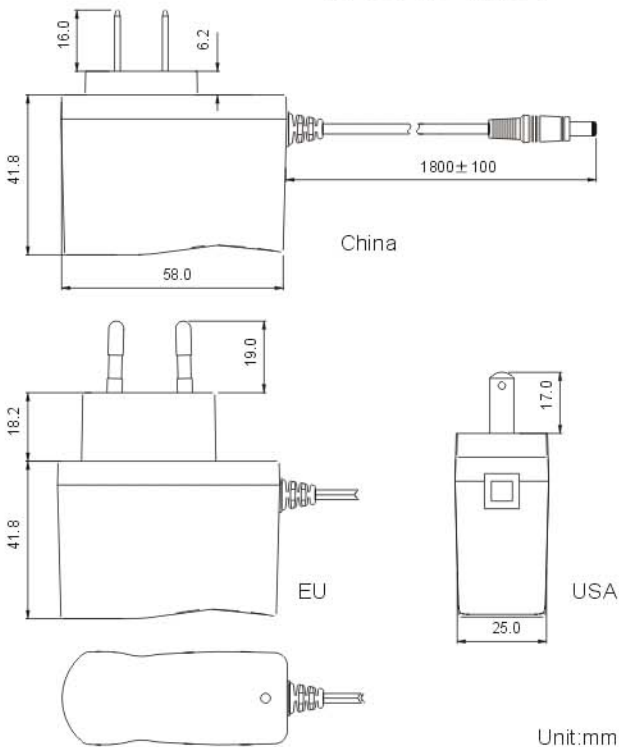

UL, CCC & CE Output Data

Model	Voltage (V)	Current (A)	Ripple (mV)
UE04L1-040YYSPAZ	4.0	0.01-0.80	50
UE04L1-042YYSPAZ	4.2	0.01-0.80	50
UE04L1-045YYSPAZ	4.5	0.01-0.80	50
UE04L1-048YYSPAZ	4.8	0.01-0.80	50
UE04L1-050YYSPAZ	5.0	0.01-0.80	50
UE04L1-051YYSPAZ	5.1	0.01-0.80	50
UE04L1-052YYSPAZ	5.2	0.01-0.80	50
UE04L1-055YYSPAZ	5.5	0.01-0.75	50
UE04L1-058YYSPAZ	5.8	0.01-0.70	50
UE04L1-060YYSPAZ	6.0	0.01-0.68	50
UE04L1-062YYSPAZ	6.2	0.01-0.65	50
UE04L1-065YYSPAZ	6.5	0.01-0.60	50
UE04L1-068YYSPAZ	6.8	0.01-0.60	50
UE04L1-070YYSPAZ	7.0	0.01-0.57	50
UE04L1-072YYSPAZ	7.2	0.01-0.55	50
UE04L1-075YYSPAZ	7.5	0.01-0.53	50
UE04L1-078YYSPAZ	7.8	0.01-0.51	50
UE04L1-080YYSPAZ	8.0	0.01-0.50	50

YYY: 001-080 stands for current: 0.01A-0.80A

Z: U - AC Plug for USA

C - AC Plug for China

V - AC Plug for Europe



UE Electronic

東莞市石龍富華電子有限公司

中國廣東省東莞市石龍鎮新城區黃洲祥龍路富華電子工業園

Fuhua Electronic Industrial Park, Xianglong Road, Huangzhou, New Town District,

Shilong Town, Dongguan, Guangdong Province, China. 523326

Tel: (86) 769 86022222

Fax: (86) 769 86023333

www.fuhua-cn.com

E-mail: fuhua@fuhua-cn.com

Fuhua Electronic (HK) Co., Ltd.

香港九龍彌敦道27-33號良士大廈9樓H室

Flat H, 9/F., Alpha House, 27-33 Nathan Road,

Kowloon, Hong Kong.

Tel: (852) 27391666

Fax: (852) 27395999

www.fuhua.com.hk

E-mail: fuhua@fuhua.com.hk