


T/NO.			
-------	--	--	--

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

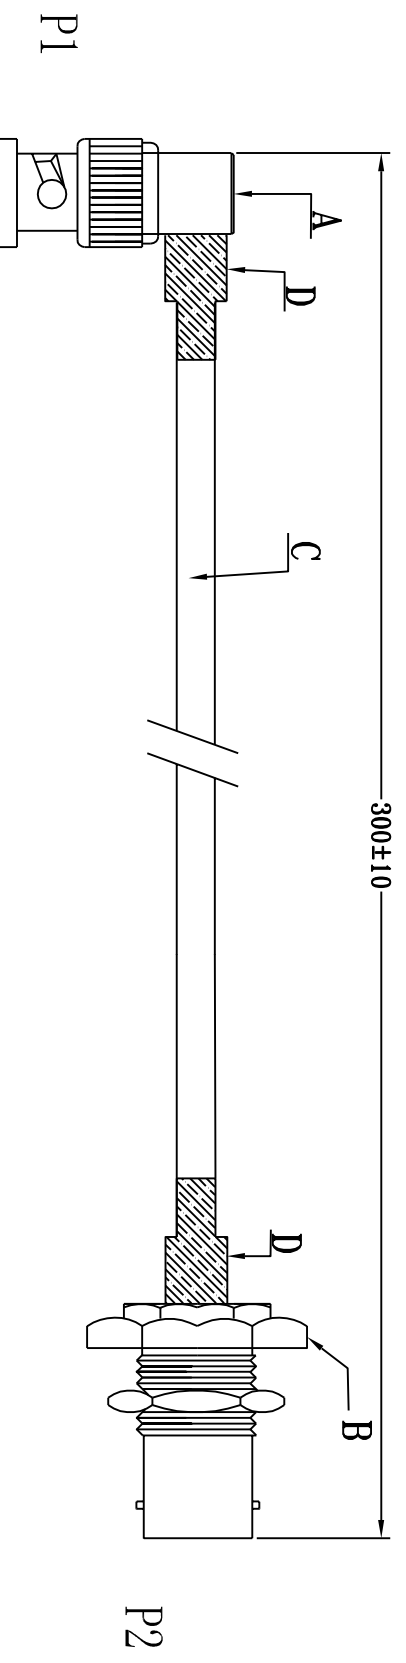

Characteristic Request:

- 1、Impedance: $50 \pm 5 \Omega$
- 2、Voltage standing-wave ratio: < 1.2 (2500M Hz)
- 3、Electrostatic capacity (pf/ft) : 29. 5 Working voltage: 500V Operating Temp: $-40 \sim +80$
- 4、Attenuation: < 1.03 dB

SPECIFICATION

- A. CONN: BNC M 90° 50Ω CNT P/N: BNC-JW2. 5DYA
- B. CONN: BNC F 180° 50Ω CNT P/N: BNC - (F) KY2. 5DY
- C. Cable: RG316D 50Ω Double-decked braided shield level Color: Brown
OD=2. 8MM L=300+5/-0mm
- D. SHR TUBE: $\Phi 5. 0 \times 20$ mm Ordinary

Q'TY

- 1
- 1
- 1
- 2

Comlink		ELECTRONICS CO.,LTD S.		TITLE RF CABLE ASSEMBLY		PROJECTION: 	
DRAWN BY Zhiyu.yu	DATE 06-6-12	PART NUMBER BNC CABLE ASSEMBLY	DRAWING NUMBER	UNITS: mm	SCALE: NONE		
CHECKED BY ---	DATE ---			REV. A0	SIZE: A4		
APPROVED BY Hunter.yan	DATE 06-6-12	TOLERANCES UNLESS NOTED: X.X, X.XX, X.XXX		±0.15 ±0.10 ±0.05	SHEET: 1/1		