导电胶条(YP)尺寸(L*H*W):93*6.8*3.0(mm)

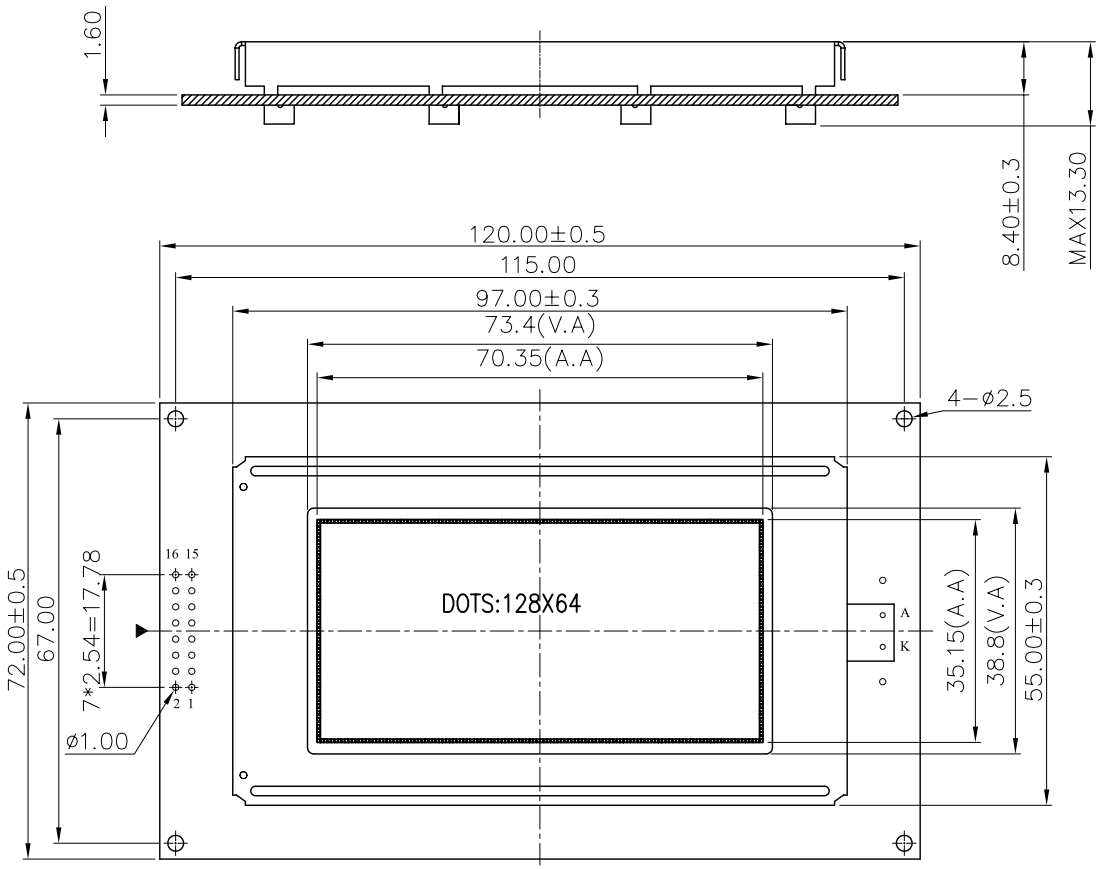



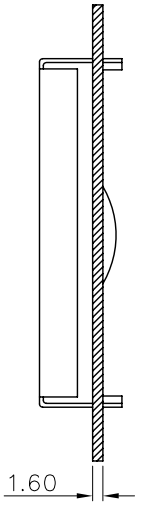

Pin No.	Symbol
1	GND
2	Vdd
3	NC
4	RS
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	BL+
16	BL-

▶ 表示封口方向

VER.	REVISED RECORD	DATE	LCM SPECIFICATION										
A0	NEW ISSUE	Mar 30.06	1.DISPLAY TYPE	STN/YELLOW-GREEN	5.VDD	5.0 V	APPROVED BY			CUSTOM NO.	STANDARD MODULE	UNMARKED TOLERANCE	±0.2
A1			2.VIEWING DIRECTION	6 O'CLOCK	6.OPERATION TEMP.	0 ℃ TO 50 ℃	CHECKED BY			DESIGN NO.& (VERSION)	A0	UNIT	mm
A2			3.POLARIZER MODE	TRANSFLECTIVE	7.STORAGE TEMP.	-10 ℃ TO 60 ℃	DRAWN BY	SUNRAY	Mar 30.06	MODEL NO.	SVM12864BSFA-10	SHEET	1 OF 1
A3			4.DRIVE METHOD	1/32 DUTY 1/5 BIAS	8.CONNECTOR	COB/ZEBRA	REMARK					FAX NO.:0755-82262915	

深圳市新深辉显示技术有限公司
CHINA DISPLAY TECHNOLOGY CO.,LTD