


T/NO.			
-------	--	--	--

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

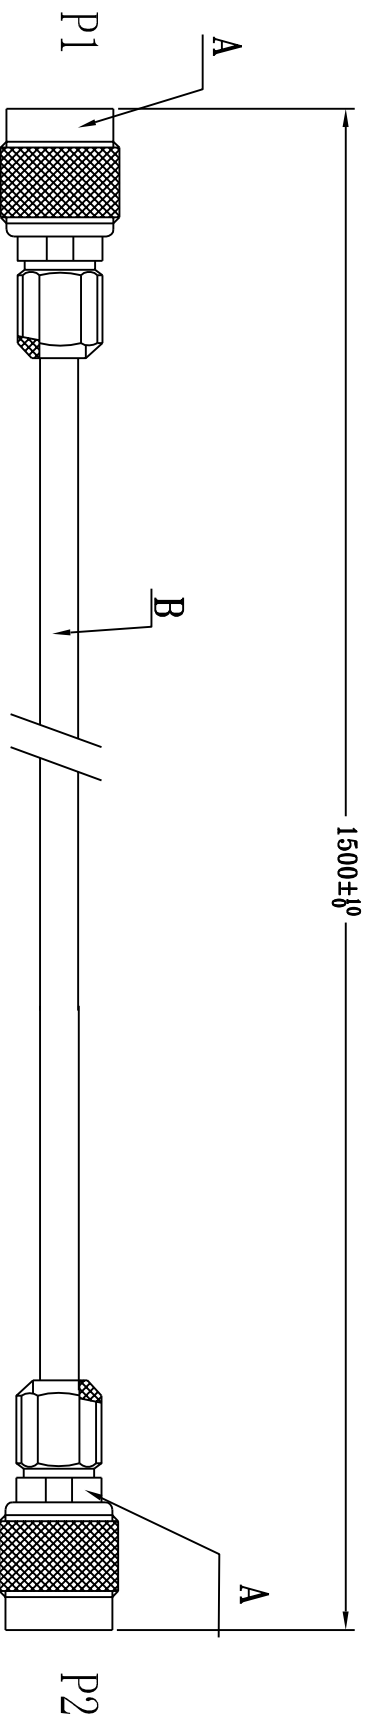

Speciality Request:

- 1、Impedance: $50 \pm 5 \Omega$
- 2、Voltage standing-wave ratio: $< 1.2 (3G)$
- 3、Electrostatic capacity (pf/ft) : 29.5 Working voltage: 1000V Operating Temp: $-40 \sim +80$
- 4、Attenuation (dB/m) :



	100Mhz	400Mhz	1Ghz	3Ghz	5Ghz	10Ghz
	0.07	0.16	0.27	0.57	---	---

SPECIFICATION

A. CONNECTOR: N M 180° 50Ω FORSTAR P/N:N-15A
 B. CABLE: RG303/U 50Ω 7/0.75 single braid shield layer
 Color:black OD=4.5mm L=1500±10mm

Q'TY

2
1

 ELECTRONICS CO.LTD S.		TITLE		PROJECTION:	
		RF CABLE ASSEMBLY			
DRAWN BY	DATE	PART NUMBER	UNITS:		
Zhiyu.yu	2006-6-12	N TYPE CABLE ASSEMBLY	mm		
CHECKED BY	DATE	DRAWING NUMBER	SCALE:	NONE	
---	---		SCALE:	NONE	
APPROVED BY	DATE	TOLERANCES UNLESS NOTED: X.X, X.XX, X.XXX		REV.	SIZE:
Hunter.yan	2006-6-12			A0	A4
				SHEET:	1/1