


T/NO.			
-------	--	--	--

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

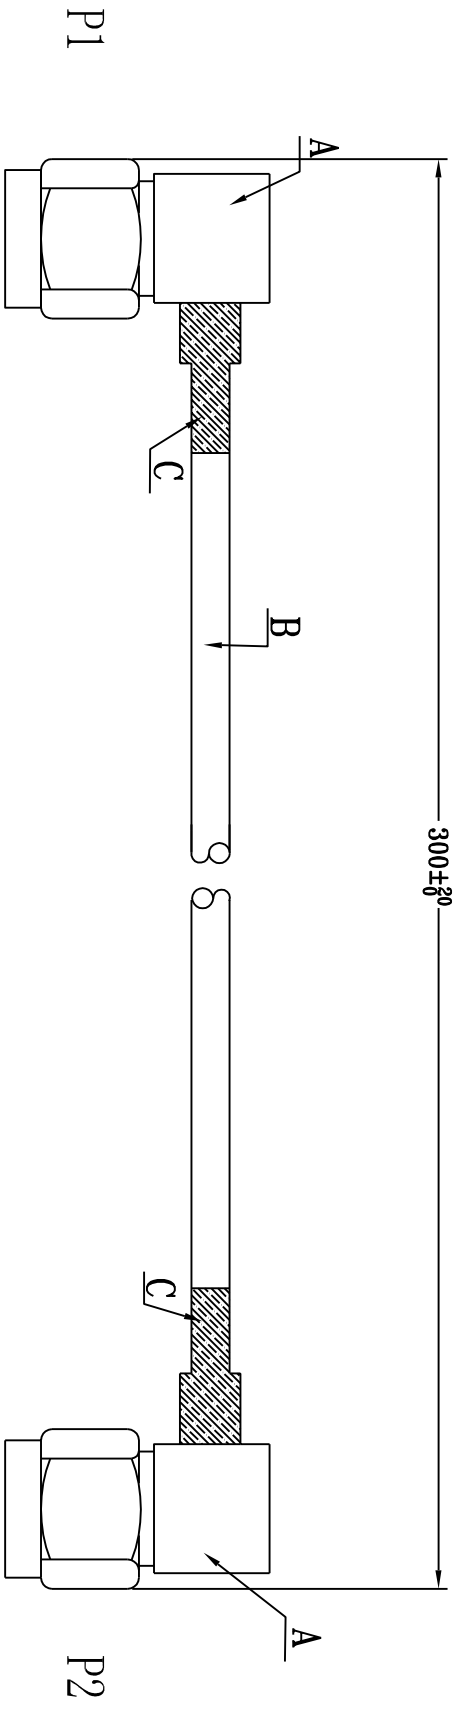

Characteristic Request:

1. Impedance: $50 \pm 5 \Omega$
2. Voltage standing-wave ratio: $< 1.2 (3\sigma)$
3. Electrostatic capacity (pf/ft) : 29.30 Working voltage: 335V Operating Temp: $-40 \sim +80$
4. Attenuation (dB/M) :

100Mhz	400Mhz	1Ghz	3Ghz	5Ghz	10Ghz
--	0.26	0.40	0.73	1.1	1.49

SPECIFICATION

A. CONNECTOR: SMA M 180° SMAJTB3 CNT P/N: SMA21111002
 B. CABLE: RG402/II 50 Ω OD=4.10MM L=300 ± 5mm
 C. SHR TUBE: φ5.0*10mm Ordinary

Q'TY

2
1
2

		TITLE		PROJECTION:	
		RF CABLE ASSEMBLY			
ELECTRONICS CO.LTD S.		PART NUMBER		UNITS:	
DRAWN BY Zhiyu.yu		SMA CABLE ASSEMBLY		mm	
DATE 2006-6-12		DRAWING NUMBER		SCALE:	
CHECKED BY ---		REV.		NONE	
DATE ---		A0		SIZE:	
APPROVED BY Hunter.yan		TOLERANCES UNLESS NOTED: X.X, X.XX, X.XXX		SHEET:	
DATE 2006-6-12		±0.15 ±0.10 ±0.05		1/1	