


BL SERIES


THERMAL CIRCUIT BREAKER, 3A TO 50AMP

Wide selections of terminals, bushing and caps

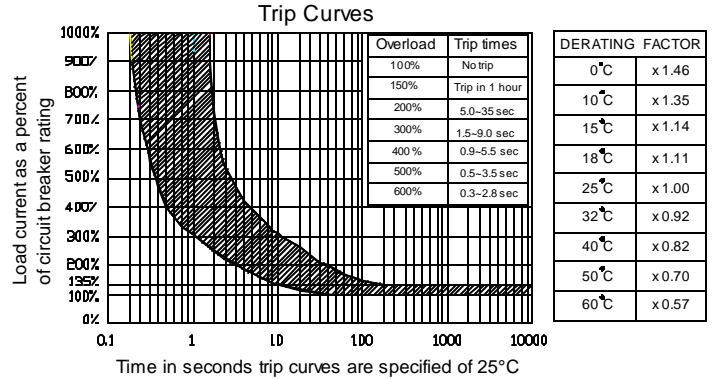

- Rating: 3.0Amp - 20.0Amp
- Input power: 125/250Vac, 50Vdc, 50/60Hz
- Interrupt capacity: 1000Amp
- Dielectric strength: 1500Vac, 1 minute
- Resettable overload capacity: 10 times rated current
- Voltage drop: less than 0.25V
- Insulation resistance: 100 M. ohms
- Reset time: min.1 minute

- Temperature rise at terminal block less than 117 (65) at 100% of rated current applied continuously at 70 (25) Calibration at 25 :
- 100% of rated current: hold, no-trip
- 150% of rated current: trip in 1 hour
- 200% of rated current: 5.0~35 seconds trip
- 300% od rated current: 1.5~9.0 seconds trip
- Reset: Manual push reset or auto reset

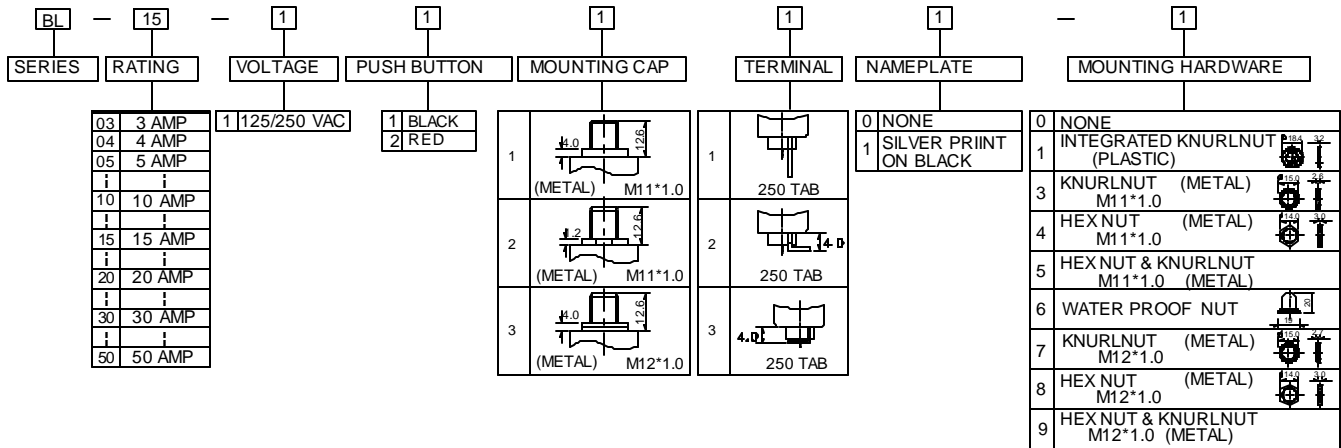

BL10-111114

