


5140-XXSMXWX01





5140-XXSMXWX02


0.50mm FPC Connector

SPECIFICATIONS

Current Rating: 0.4AMP
 Contact Resistance: 20m Ω Max. FILE NO.E248993
 Insulation Resistance: 500M Ω Min.
 Withstanding Voltage : 50V AC/Minute
 Operation Temperature: -40°C to+80°C
 Contact Material: Phosphor Bronze
 Fitting Nail: Brass
 Insulator Material: Polyester (UL94V-0)
 StandAr: PBT+30%GF

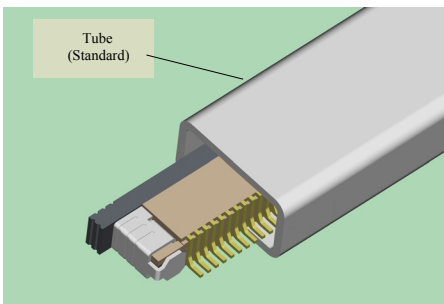

5140-XXRMBWX01

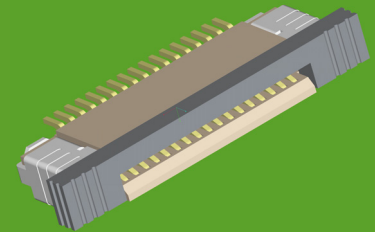

5140-XXRMUWX01

5140- XX X X W X 01



NO.OF PINS PER ROW
 04~60P

CONTACT SHARP
 S: Straight Angle
 R: Right Angle

SOLDER TYPE
 D: DIP
 M: SMT

CONTACT TYPE
 D: Dual contact
 U: Up contact
 B: Bottom contact

INSULATOR COLOUR
 B: Black W: White
 E: Beige A: Brown

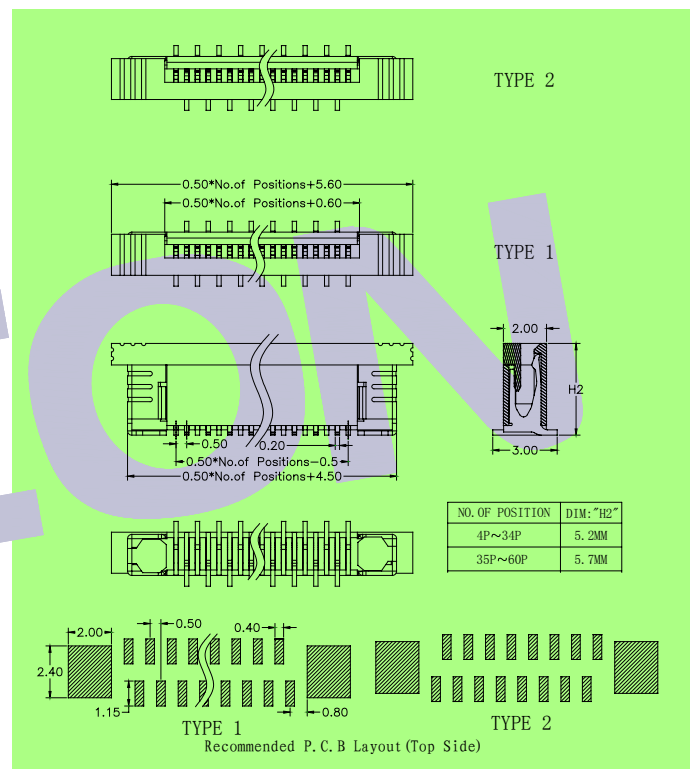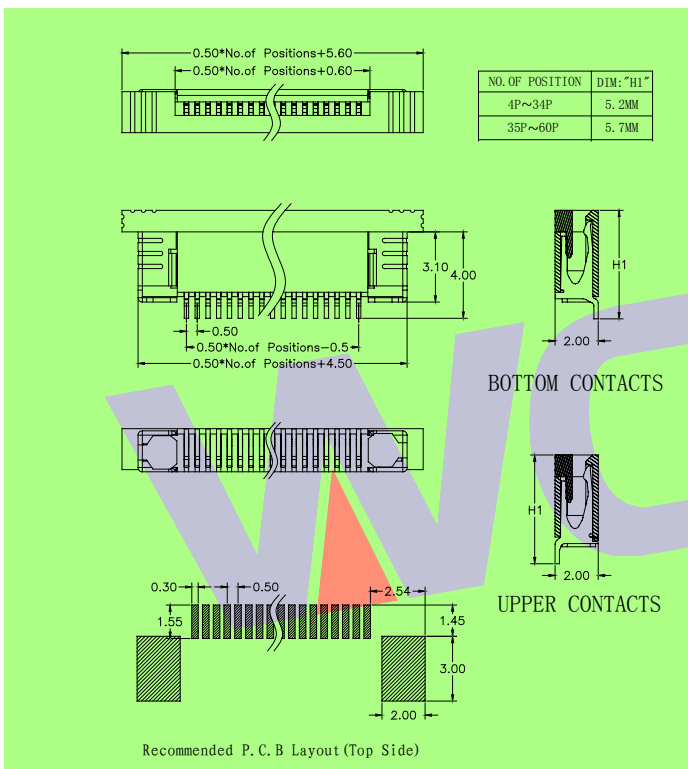

※INNOVATION AND DEVELOPMENT※CONTINUAL IMPROVEMENT※QUALITY FOREMOST※CUSTOMER SATISFACTION※