


## Powerful Pump



FDP-200

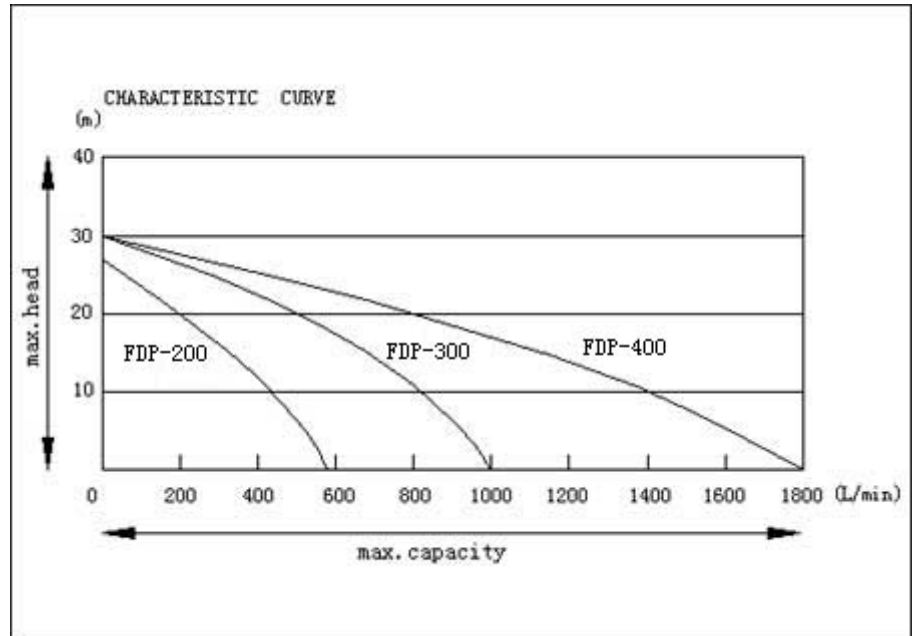


### Characteristics:

- \*High pressure casting aluminum alloy for pump body
- \*Compact in structure and lightweight
- \*Carbon-ceramic mechanical seal resists wear and heat well
- \*Standard cast iron impeller and volute last long in clear water applications

|             | Model                  | FDP-200  | FDP-300  | FDP-400  |
|-------------|------------------------|----------|----------|----------|
| <b>PUMP</b> | Outlet/inlet dia.(in.) | 2"/2"    | 3"/3"    | 4"/4"    |
|             | Max.capacity (l/min.)  | 600      | 1000     | 1800     |
|             | Total head (m)         | 30       | 30       | 30       |
|             | Sution head (m)        | 8        | 8        | 8        |
|             | Working speed (rpm)    | 3600     | 3600     | 3600     |
|             | Dimension (cm) LxWxH   | 34x22x20 | 39x25x24 | 54x40x37 |
|             | Weight (kg)            | 7        | 9.5      | 16       |




FDP-300

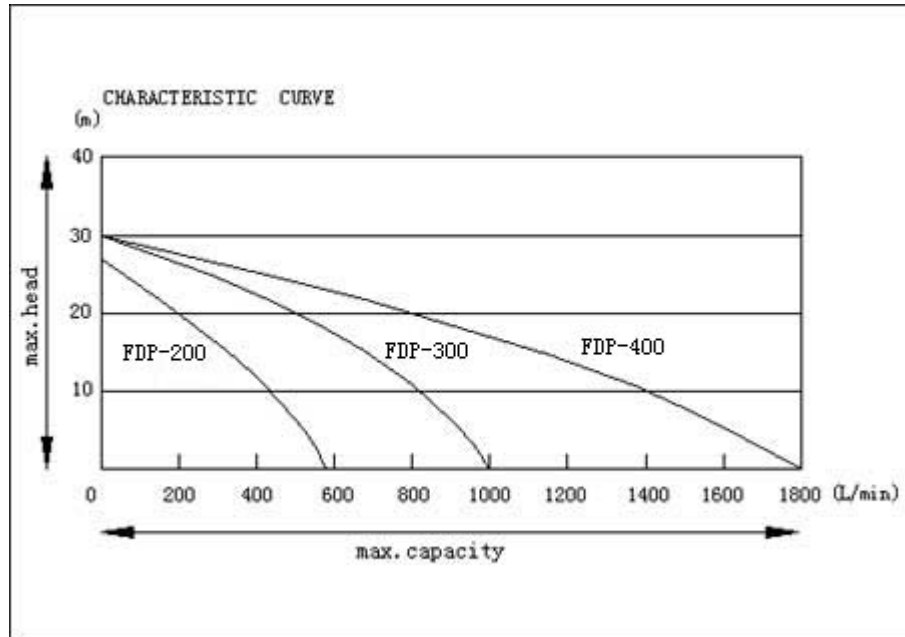

Characteristics:

- \*High pressure casting aluminum alloy for pump body
- \*Compact in structure and lightweight
- \*Carbon-ceramic mechanical seal resists wear and heat well
- \*Standard cast iron impeller and volute last long in clear water applications

|             | <b>Model</b>           | <b>FDP-200</b> | <b>FDP-300</b> | <b>FDP-400</b> |
|-------------|------------------------|----------------|----------------|----------------|
| <b>PUMP</b> | Outlet/inlet dia.(in.) | 2"/2"          | 3"/3"          | 4"/4"          |
|             | Max.capacity (l/min.)  | 600            | 1000           | 1800           |
|             | Total head (m)         | 30             | 30             | 30             |
|             | Sution head (m)        | 8              | 8              | 8              |
|             | Working speed (rpm)    | 3600           | 3600           | 3600           |
|             | Dimension (cm) LxWxH   | 34x22x20       | 39x25x24       | 54x40x37       |
|             | Weight (kg)            | 7              | 9.5            | 16             |

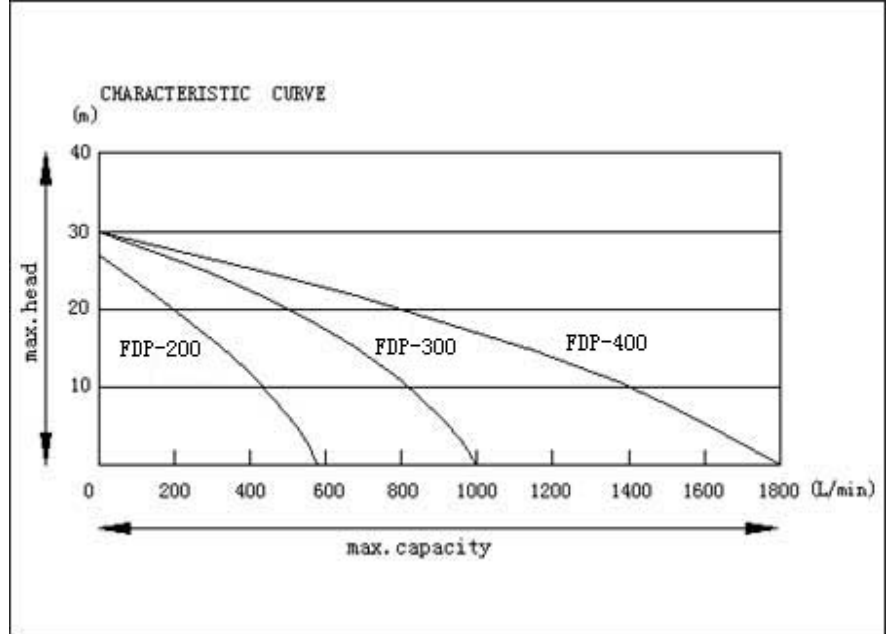

FDP-400

**Characteristics:**

- \*High pressure casting aluminum alloy for pump body
- \*Compact in structure and lightweight
- \*Carbon-ceramic mechanical seal resists wear and heat well
- \*Standard cast iron impeller and volute last long in clear water applications

|             | <b>Model</b>           | <b>FDP-200</b> | <b>FDP-300</b> | <b>FDP-400</b> |
|-------------|------------------------|----------------|----------------|----------------|
| <b>PUMP</b> | Outlet/inlet dia.(in.) | 2"/2"          | 3"/3"          | 4"/4"          |
|             | Max.capacity (l/min.)  | 600            | 1000           | 1800           |
|             | Total head (m)         | 30             | 30             | 30             |
|             | Sution head (m)        | 8              | 8              | 8              |
|             | Working speed (rpm)    | 3600           | 3600           | 3600           |
|             | Dimension (cm) LxWxH   | 34x22x20       | 39x25x24       | 54x40x37       |
|             | Weight (kg)            | 7              | 9.5            | 16             |