


T/NO.	T1: 329-01	
	T2: 330-01	

REVISIONS		DATE	APPROVED
REV	DESCRIPTION		

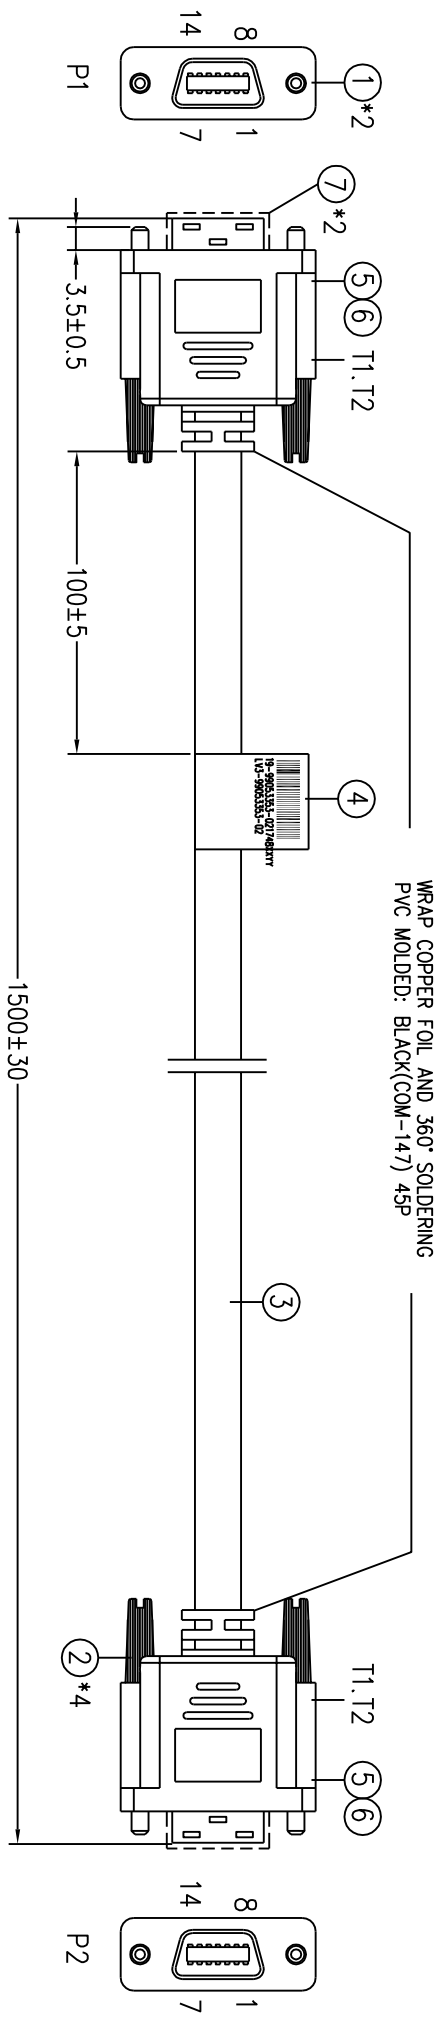

Technology Request:
1. The unnecessary core must trim off.

SPECIFICATION

Q' TY

- CONN. : D TYPE 14PIN PITCH1.27mm MALE SOLDER Double edge AGON P/N:HBW15-14K4200 2 OR 3M P/N:10114-3000VE
- SCREW: #4-40UNC ABS MOLDED Small E BLACK(COM-147) L=23.0mm 4
- CABLE: 100ohm UL20276 (1P*26AWG+D)*4+AL+B BLACK(COM-147) OD:7.0mm 1
LTK P/N: 20276 26*4P L=1490mm
- BAR CODE: WHITE BACKGROUND WITH BLACK CHARACTER, FONT HEIGHT 2.0mm MIN, STAMP "19-99053353-02/1748XXYY LV3-99053353-02", L*W=45*26mm 1
- H.S. TUBE: ID1.0*13mm BLACK SHRINK RATIO>50% 4
- H.S. TUBE: ID2.0*10mm BLACK SHRINK RATIO>50% 4
- DUST COVER: TRANSPARENT PVC MOLDED USED FOR D TYPE 14PIN Double edge MALE 2

WIRE LIST

P1	P2	COLOR
9	10	WHITE
10	9	BLUE
11	11	D
12	12	WHITE
13	14	ORANGE
14	13	D
SHELL	SHELL	BRAID

		TITLE		PROJECTION:	
		CPRI TEST CABLE ASSEMBLY			
DRAWN BY		DATE		PART NUMBER	
Zhiyu.yu		2006-07-25		99053353-02	
CHECKED BY		DATE		DRAWING NUMBER	
APPROVED BY		DATE		TOLERANCES UNLESS NOTED:	
				UNITS: mm	
				SCALE: NONE	
				REV. SIZE: A4	
				SHEET: 1/1	