


DISPLAY PATTERN

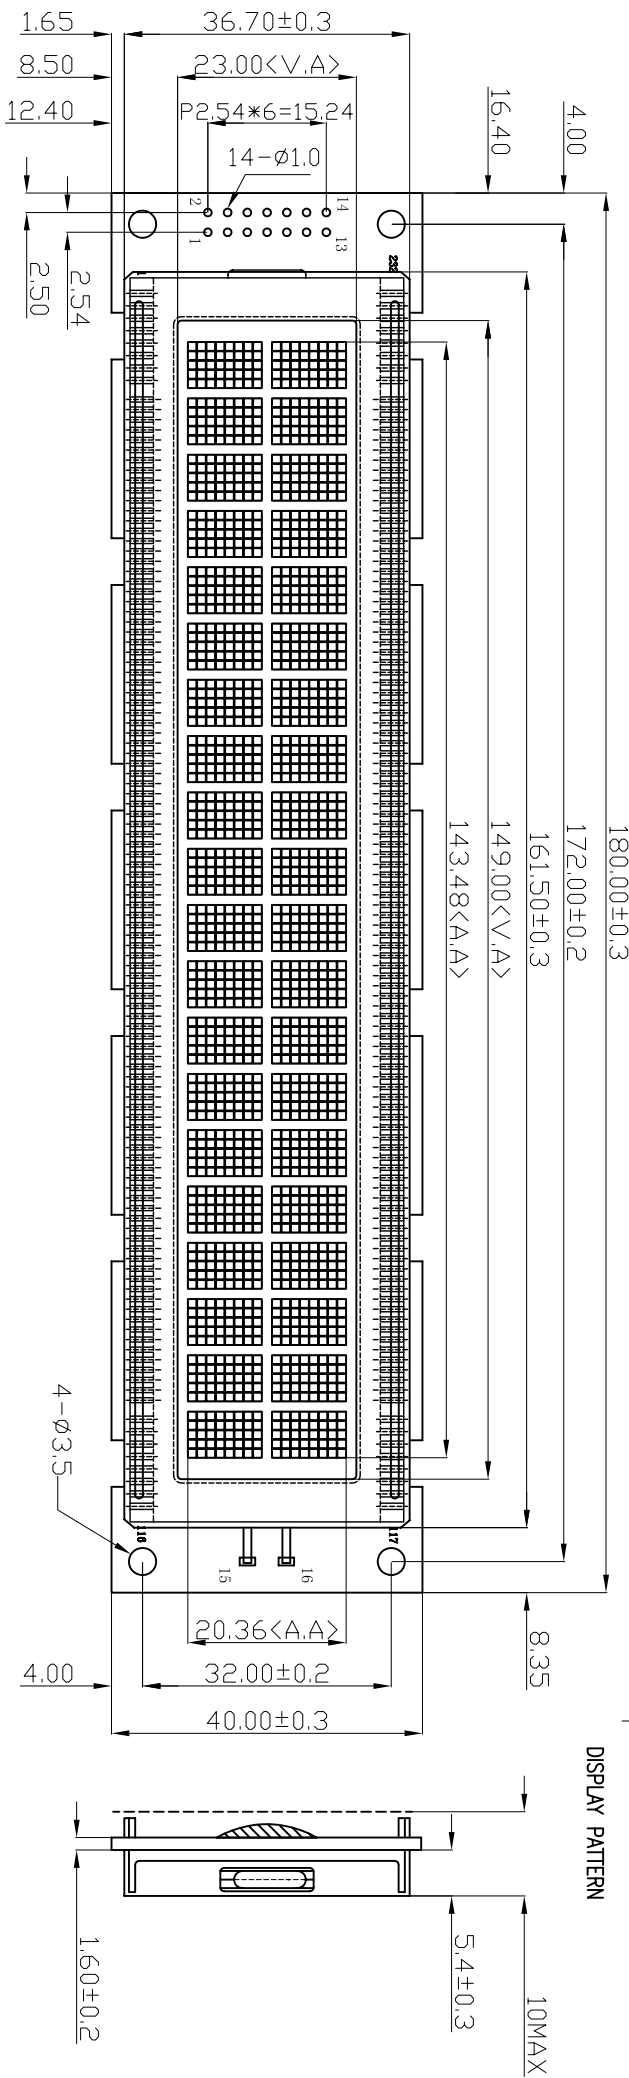

Pin No.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Define	VSS	VDD	V0	RS	R/W	R	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	EL	背光

表示封口方向

VER.	REVISED RECORD	DATE	LCM SPECIFICATION	UNMARKED TOLERANCE	
A0	NEW ISSUE	07.05.16	1.DISPLAY TYPE	TN/POSITIVE	±0.2
A1	更改外形	07.05.30	2.VIEWING DIRECTION	12 O'CLOCK	mm
A2			3.POLARIZER MODE	TRANSPARENT	SHEET 1 OF 1
A3			4.DRIVE METHOD	1/16 DUTY 1/5 BIAS	FAX NO:0755-8226295

OPERATION TEMP.	APPROVED BY	DESIGN NO.& (VERSION)	MODEL NO.	UNIT
0 °C TO 50 °C	CHECKED BY	YXZ	07.05.30	A1
-10 °C TO 60 °C	DRAWN BY			
ZEBRA	REMARK			

CHINA DISPLAY TECHNOLOGY CO.,LTD	深圳市新深辉显示技术有限公司
CUSTOM NO.	MDD2343

