


SPECIFICATIONS

MODEL	KM-37B3529-90-0628	RATED VOLTAGE	DC 6V	SAMPLE NUMBER	
-------	--------------------	---------------	-------	---------------	--

OUTLINE

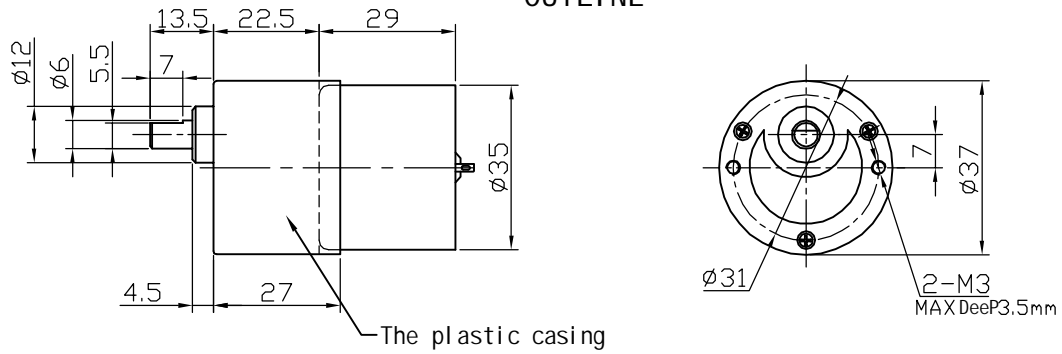

VOLTAGE	NO LOAD		ON LOAD				
	CURRENT	SPEED	CURRENT	SPEED	TORQUE	OUTPUT	EFF
v	A	rpm	A	rpm	Kg. cm	W	%
6	0.53	27.7	0.12	23	2	0.47	65.5

REFERENCE CHARACTERISTICS

- 1 DIRECTION OF ROTATION: ANTI-CLOCKWISE WHEN VIEWING MOTOR OUTPUT SIDE WITH POSITIVE VOLTAGE APPLIED TO POSITIVE TERMINAL
- 2 NO LOAD: CURRENT: $\leq 0.08A$
- 3 NO LOAD: SPEED: $28 \text{ RPM} \pm 10\%$
- 4 MOTOR END PLAY: $\leq 0.4 \text{ MM}$
- 5 OPERATING TEMPERATURE RANGE: $-10^{\circ}\text{C} \sim +60^{\circ}\text{C}$
- 6 OPERATING HUMIDITY RANGE: 20 %-90%
- 7 GO WITH MOTOR RANGE: ZYT-3529 6V 2600rpm/min

CUSTOMER APPROVAL:

PREPARED BY	APPROVED BY	DATE	
-------------	-------------	------	--