

UE24WZ-SPA

Switching Power Adaptor
24 Watt



• Technical data

Input voltage	100-240V AC
Input current	600mA
Frequency	50-60Hz
Efficiency	meets CEC requirements
Output voltage tolerance	±5%
Low standby power	0.5W Max.
Low leakage current	10uA Max. no Y capacitor

• Environmental specification

Operation temp.	0°C to 40°C at maximum load
Storage temp.	-20°C to 60°C
Humidity	5% to 95% non condensing

• Safety specification

Safety approval	cCSAus (CSA60950 and CSA601) TUV-GS (EN60950 and EN60601) CE Mark PSE-JET C-Tick KETI CCC (GB4943 and GB8898)
-----------------	---

• Reliability specification

MTBF calculation	50,000 hours at maximum load levels and an ambient temperature of 25°C (in correspondence with MIL-HDBK-217)
------------------	--

• Mechanical specification

AC plug	Main plugs are available for the following countries: China, USA, EU, UK, Japan, Australia & Korea
Weight	163g (not including AC plug) AC plug for China, USA, Japan: 10g AC plug for EU: 17g AC plug for UK: 27g AC plug for Korea: 19g AC plug for Australia: 15g
Dimensions	88.0mm x 48.0mm X 29.0mm (3.46" x 1.89" x 1.14")

Output Data

Model	Voltage (V)	Current (A)	Ripple (mV)
UE24WZ-030YYSPA	3.0	0.01-2.50	100
UE24WZ-033YYSPA	3.3	0.01-2.50	100
UE24WZ-036YYSPA	3.6	0.01-2.50	100
UE24WZ-040YYSPA	4.0	0.01-2.50	100
UE24WZ-042YYSPA	4.2	0.01-2.50	100
UE24WZ-045YYSPA	4.5	0.01-2.50	100
UE24WZ-048YYSPA	4.8	0.01-2.50	100
UE24WZ-050YYSPA	5.0	0.01-2.50	100
UE24WZ-052YYSPA	5.2	0.01-2.50	150
UE24WZ-055YYSPA	5.5	0.01-2.50	150
UE24WZ-060YYSPA	6.0	0.01-2.50	150
UE24WZ-065YYSPA	6.5	0.01-2.50	150
UE24WZ-070YYSPA	7.0	0.01-2.50	150
UE24WZ-075YYSPA	7.5	0.01-2.50	150
UE24WZ-080YYSPA	8.0	0.01-2.50	150
UE24WZ-085YYSPA	8.5	0.01-2.50	150
UE24WZ-090YYSPA	9.0	0.01-2.20	150
UE24WZ-098YYSPA	9.8	0.01-2.20	150
UE24WZ-100YYSPA	10.0	0.01-2.20	150
UE24WZ-105YYSPA	10.5	0.01-2.00	200
UE24WZ-120YYSPA	12.0	0.01-2.00	200
UE24WZ-126YYSPA	12.6	0.01-1.90	200
UE24WZ-130YYSPA	13.0	0.01-1.85	200
UE24WZ-138YYSPA	13.8	0.01-1.75	200
UE24WZ-150YYSPA	15.0	0.01-1.60	200
UE24WZ-160YYSPA	16.0	0.01-1.50	200
UE24WZ-165YYSPA	16.5	0.01-1.45	200
UE24WZ-180YYSPA	18.0	0.01-1.33	200
UE24WZ-200YYSPA	20.0	0.01-1.20	200
UE24WZ-220YYSPA	22.0	0.01-1.09	200
UE24WZ-230YYSPA	23.0	0.01-1.04	200
UE24WZ-240YYSPA	24.0	0.01-1.00	200

YYY: 001-250 stands for current: 0.01A-2.50A

Z: U - AC Plug for Japan and USA


C - AC Plug for China

B - AC Plug for UK

V - AC Plug for Europe

S - AC Plug for Australia

CP - Changeable AC Plug

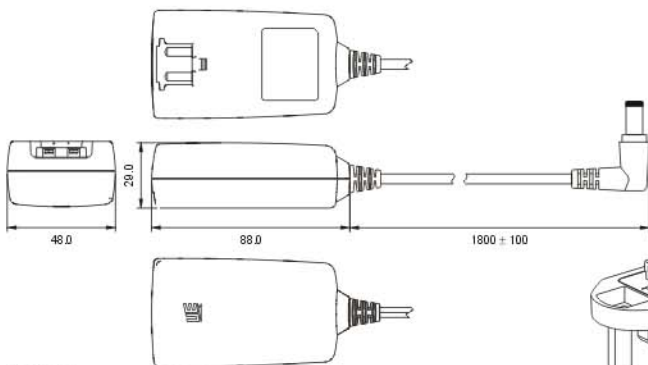

Unit:mm

