

# Power Related Series

## AC/DC Adapter 5V 1A 5V 430mA

### USB Battery charger

Emergency for Mobile



size:  
75x35x30mm

size:  
81x22x32mm

### Slim Universal type

AC Plug Adapter: 92x39x19mm  
2.5A; 110V max. 275W; 220V max. 550W



USB Charger:  
98x39x21mm



Retractable Cable: 1.5M

### Car charger

Retractable


size: 110x46x30mm  
\* Input: 11.4Vdc ~24.6Vdc  
\* Output Voltage: 5.0Vdc  
\* Max. Load: 800mA±50mA  
\* No Load Voltage: 5.0~5.6Vdc



size: 78x30x23mm  
\* Input: 11.4Vdc ~24.6Vdc  
\* Output Voltage: 5.0Vdc  
\* Max. Load: 600mA  
\* No Load Voltage: 5.0~5.6Vdc

size: 103x33x52mm  
\* Input: 11.4Vdc ~24.6Vdc  
\* Output: 5.0Vdc  
\* Max. Load: 500mA  
\* No Load Voltage: 5.1~5.6Vdc  
\* Ripple & Noise(\*) 100mVp-p

### Twin Travel Charger

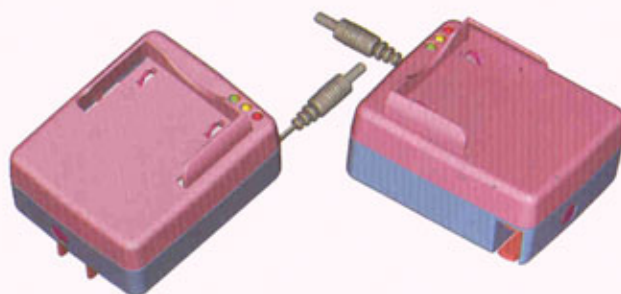

### Mini Travel Charger

size: 32x45x22mm



### Adapter w/cable

size: 73x50x25mm



Polymax Precision Industry Co., Ltd.

2, Alley 20, Lane 199, San Jen St., Shu-Lin City, Taipei County, Taiwan, R.O.C.

Tel: 886-2-2689-8577 / 2688-3270 Fax: 886-2-2688-1070

URL: [www.duplug.com](http://www.duplug.com) email: [polymaxe@ms7.hinet.net](mailto:polymaxe@ms7.hinet.net)