



WALTER ELECTRONIC CO., LTD

In an effort to comply with the REACH (Registration, Evaluation, Authorization and Restriction of Chemicals) regulation passed by the EU, we, Walter, hereby declares that all of fuse products completely conform to the content requirement- lower than 0.1% W/W for the 15 candidate SVHC (Substances of Very High Concern) substances listed as below.

NO	物質名稱	Name of hazardous substance	CAS NO.	EC NO.
1	蔥	Anthracene	120-12-7	204-371-1
2	44'-二胺基二苯甲烷 (特定偶氮化合物)	44'-Diaminodiphenylmethane	101-77-9	202-974-4
3	鄰苯二甲酸二丁酯	Dibutyl-phthalate	84-74-2	201-557-4
4	氯化鈷	Cobalt dichloride	7646-79-9	231-589-4
5	五氧化二砷	Diarsenic pentaoxide	1303-28-2	215-116-9
6	三氧化二砷	Diarsenic trioxide	1327-53-3	215-481-4
7	重鉻酸鈉二水合物	Sodium dichromate	7789-12-0	234-190-3
8	二甲苯麝香	5-tert-butyl-2,4,6-trinitro-m-xylene (musk xylene)	81-15-2	201-329-4
9	鄰苯二甲酸二(2-乙基己)酯	Bis(2-ethyl(hexyl)phthalate)(DEHP)	117-81-7	204-211-0
10	六溴環十二烷	Hexabromocyclododecane(HBCDD) and all major diastereoisomers identified(α -HBCDD, β -HBCDD, γ -HBCDD)	25637-99-4 and 3194-55-6(134237-51-7, 134237-50-6, 134237-52-8)	247-148-4 and 221-695-9
11	短鏈氯化石蠟	Alkanes,C10-13,chloro(Short Chain Chlorinated Paraffins)	85535-84-8	85535-84-8
12	三丁基氧化錫	Bis(tributyltin)oxide	56-35-9	200-268-0
13	酸式砷酸鉛	Lead hydrogen arsenate	7784-40-9	232-064-2
14	苯二甲酸二丁酯	Benzyl butyl phthalate	85-68-7	201-622-7
15	三乙基砷酸酯	Triethyl arsenate	15606-95-8	427-700-2

簽名 (Signature) :

職位 (Title) :

簽署日期(Dated):



2009.05.22



ASM Series Fast-Acting Type



Unit: mm

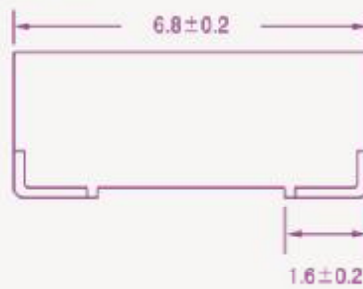

Structure

No.	Component	Material	Quantity
1	Electrode	Brass with nickel plated	2
2	Body	Plastic	1

Electrical characteristics

Rated Current	1.25 IN	2 IN	10 IN	
	Min.	Max.	Min.	Max.
1-6.3A	1 hour	120 Sec.	1 mS	10 mS

Temperature character

When 125% of rating the temperature rise doesn't exceed 85K.

Approvals

Catalogue Number	Rated Current	Voltage (AC/DC)	Breaking Capacity	Power Factor		
ASM	1.0A	125V	50A	>95%	⊙	⊙
ASM	1.25A	125V	50A	>95%	⊙	⊙
ASM	1.6A	125V	50A	>95%	⊙	⊙
ASM	2.0A	125V	50A	>95%	⊙	⊙
ASM	2.5A	125V	50A	>95%	⊙	⊙
ASM	3.15A	125V	50A	>95%	⊙	⊙
ASM	4.0A	125V	50A	>95%	⊙	⊙
ASM	5.0A	125V	50A	>95%	⊙	⊙
ASM	6.3A	125V	63A	>95%	⊙	⊙

● Approved 已認證 ⊙ Pending 認證中