




ASM Series Fast-Acting Type



Unit: mm

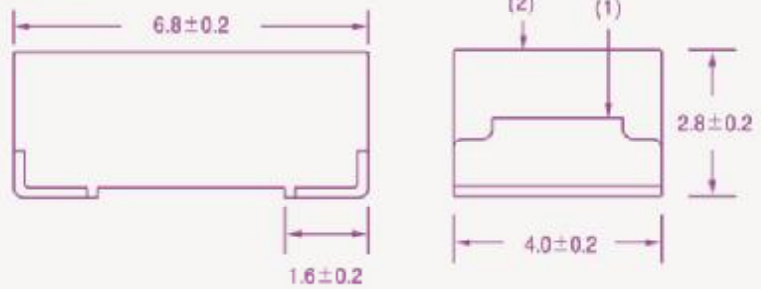

Structure

No.	Component	Material	Quantity
1	Electrode	Brass with nickel plated	2
2	Body	Plastic	1

Electrical characteristics

Rated Current	1.25 IN		2 IN		10 IN	
	Min.	Max.	Min.	Max.	Min.	Max.
1-6.3A	1 hour	120 Sec.	1 mS	10 mS		

Temperature character

When 125% of rating the temperature rise doesn't exceed 85K.

Approvals

Catalogue Number	Rated Current	Voltage (AC/DC)	Breaking Capacity	Power Factor		
ASM	1.0A	125V	50A	>95%	⊙	⊙
ASM	1.25A	125V	50A	>95%	⊙	⊙
ASM	1.6A	125V	50A	>95%	⊙	⊙
ASM	2.0A	125V	50A	>95%	⊙	⊙
ASM	2.5A	125V	50A	>95%	⊙	⊙
ASM	3.15A	125V	50A	>95%	⊙	⊙
ASM	4.0A	125V	50A	>95%	⊙	⊙
ASM	5.0A	125V	50A	>95%	⊙	⊙
ASM	6.3A	125V	63A	>95%	⊙	⊙

● Approved 已認證 ⊙ Pending 認證中