



waterproof Piranha LED bar with aluminum profile

Where can it be used?


- ◆ replacement of inflourescent light
- ◆ back or edge light of illuminated signs
- ◆ boarding light for bridge, commercial/civil buildings
- ◆ marine application
- ◆ indoor decoration
- ◆ accent light for fountain, swimming pool, spring and waterfall

Descriptions & Features

- nicely treated aluminum housing
- high bright Piranha/super flux LEDs
- totally waterproof; IP68
- connectable each other with mating cables, no light break between the connection
- beam angle 40 to 120 degrees
- maintenance free, energy efficient
- easy installation
- standard warranty 3 years

The biggest advantage of SC-AS series is each bar can be connected to another one without light break. So you can light up a long string with SC-AC. That is the reason why it is the ideal light for boarding of bridge, building, canopy, stairway, elevator, shop window and yacht.

The picture on the right shows how the bars look like while placed together.

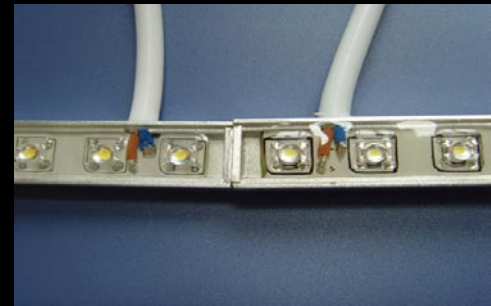












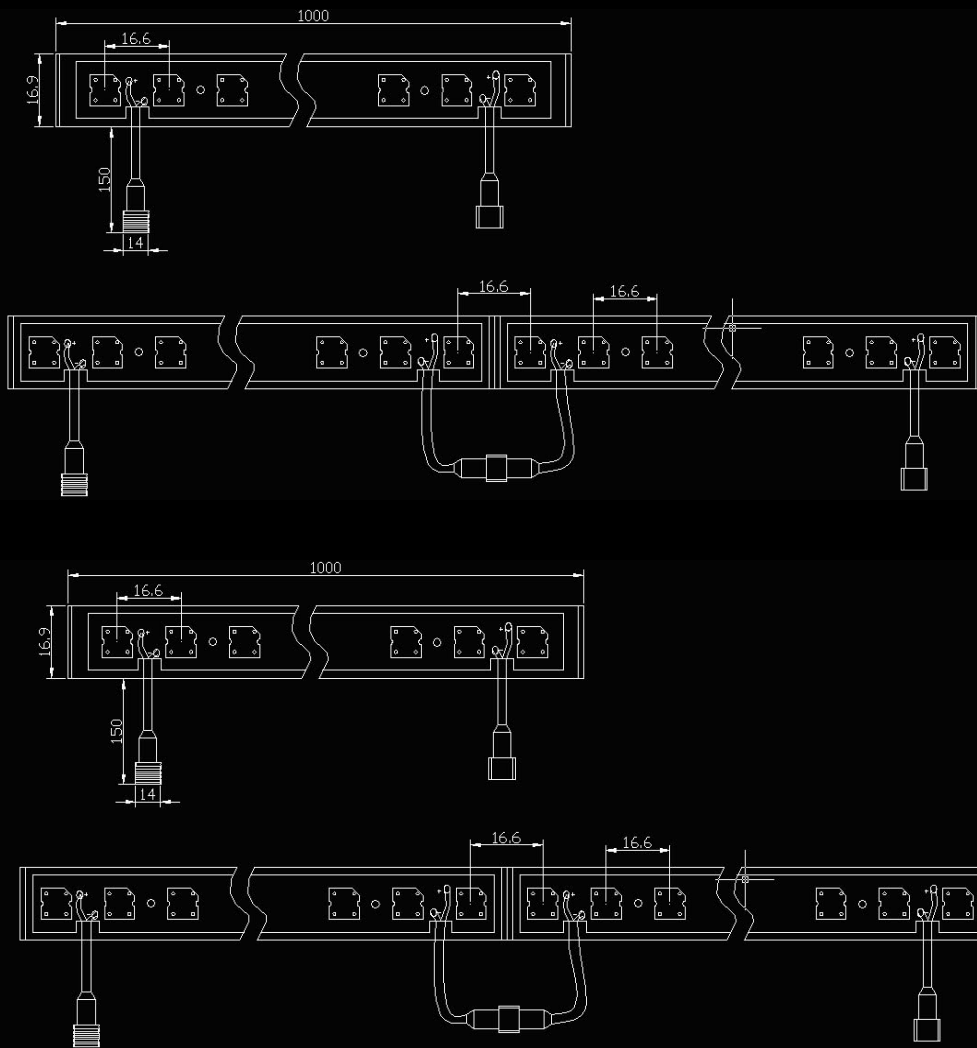



The standard length is 1m and 0.5m. Clients can specify the length less than 1.5m. So the specific length can be tailored to their application or projects. Signcomplex also offers client labels and designs PCB with client logo. Over 500 pcs lot order is required in this case.

accessories include

- 1) mounting clip
- 2) cable to power supply





Model-Number	Color	LED-Q'ty	Light-Output	Beam-Angle	Voltage	Current	Recommend-Connect
SC-AS30-R		30 pcs	27 lumens	90 deg.	12V DC	0.2A	40 bars
SC-AS30-Y		30 pcs	27 lumens	90 deg.	12V DC	0.2A	40 bars
SC-AS30-B		30 pcs	18 lumens	90 deg.	12V DC	0.2A	40 bars
SC-AS30-G		30 pcs	48 lumens	90 deg.	12V DC	0.2A	40 bars
SC-AS30-W		30 pcs	53 lumens	90 deg.	12V DC	0.2A	40 bars
SC-AS30-WW		30 pcs	53 lumens	90 deg.	12V DC	0.2A	40 bars
SC-AS30-RGB		30 pcs	58 lumens	90 deg.	12V DC	0.6A	20 bars
SC-AS60-R		60 pcs	54 lumens	90 deg.	12V DC	0.4A	20 bars
SC-AS60-Y		60 pcs	54 lumens	90 deg.	12V DC	0.4A	20 bars
SC-AS60-B		60 pcs	36 lumens	90 deg.	12V DC	0.4A	20 bars
SC-AS60-G		60 pcs	96 lumens	90 deg.	12V DC	0.4A	20 bars
SC-AS60-W		60 pcs	105 lumens	90 deg.	12V DC	0.4A	20 bars
SC-AS60-WW		60 pcs	105 lumens	90 deg.	12V DC	0.4A	20 bars
SC-AS60-RGB		60 pcs	98 lumens	90 deg.	12V DC	1.2A	10 bars