


CUSTOMER		DESCRIPTION	CHOKE
----------	--	-------------	-------

**1. OUTLINE DIMENSION(UNIT:mm):**

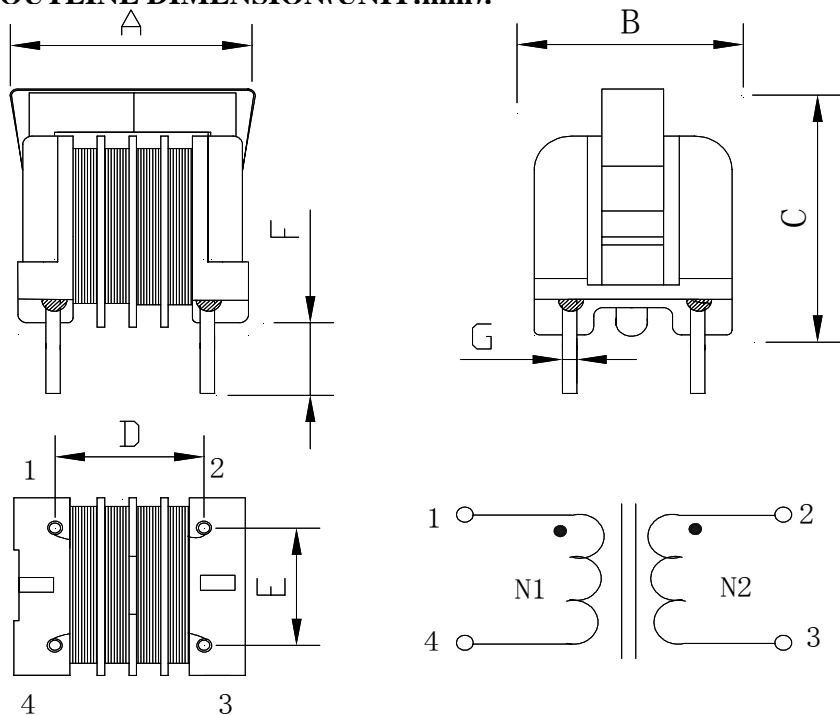

A	18.0 MAX
B	17.5MAX
C	22 MAX
D	13±0.5
E	10±0.5
F	3.5MIN
G	∅ 0.8±0.1

UU10.5-47mH  
BELTA YYWW  
LABEL

**2. WINDING PARAMETER:**

NO.	WINDING	MATERIAL	S--F	TURNS	REMARK
1	N1	2UEW ∅0.23mm	1---4	157T(REF)	
2	N2	2UEW ∅0.23mm	2----3	157T(REF)	


**3. ELECTRICAL CHARACTERISTIC:**

NO.	ITEM	MEASURE POINT	TECHNICAL DATA	REMARK
1	INDUCTANCE	N1,N2	47mH+50%-30%	1KHz 0.25V
2	RESISTANCE	N1,N2	3.4Ω MAX	25°C

**4. MATERIAL LIST:**

NO.	MATERIAL NAME	MATERIAL SPEC.	PROVIDER	UL NO.
1	CORE	UF10.5 TS10	TDG OR EQUIVALENT	
2	BOBBIN	PM9820	SUMITOMO BAKELTE	E41429
3	WIRE	MW75C 130°C	JIANGSU DARTONG QING JIANG M&E CO.LTD OR EQUIVALENT	E237377
4	CLIP	UU10.5 SUS 301	JIN SHENG ELECTRONIC CO.LTD OR EQUIVALENT	
5	VARNISH	8562/C	HANG CHENG or EQUIVALENT	E200154

REMARK:

 <b>BELTA</b> SHENZHEN BELTA TECHNOLOGY CO., LTD	DRAWN BY	CHECKED BY	APPROVED BY	CUSTOMER P/N