

## HIGH POWER TYPE TERMINAL BLOCK

### ETB73 SERIES

UL Pending

#### FEATURES


- Designed for high power application
- Easy to assemble for any number of positions
- End stackable without any loss of P.C.B. space
- Special wire protector design to ensure reliable wire clamping
- UL 94V-0 grade fire retardant engineering plastic used for the housing
- Be capable of clamping a wide range of wire diameters
- Compact size for P.C.B.

#### SPECIFICATIONS

- |                         |   |
|-------------------------|---|
| ● Pitch                 | 9mm(0.354inch)  |
| ● Wire range            | 10 AWG to 24 AWG                                      |
| ● No. of pole per Block | 2 or 3  |
| ● Rated                 | 35 Amp, 600 VAC                                       |
| ● Housing               | Polybutylene terephthalate, Blue                      |
| ● Terminals             | Tin plated over Brass                                 |
| ● Screws                | M3.5x0.6P, Yellow Chromated<br>Zinc plated over Steel |
| ● Wire Cage             | Nickel plated over Brass                              |
| ● Cover                 | Polybutylene terephthalate, Blue                      |





#### PART NUMBERING SYSTEM

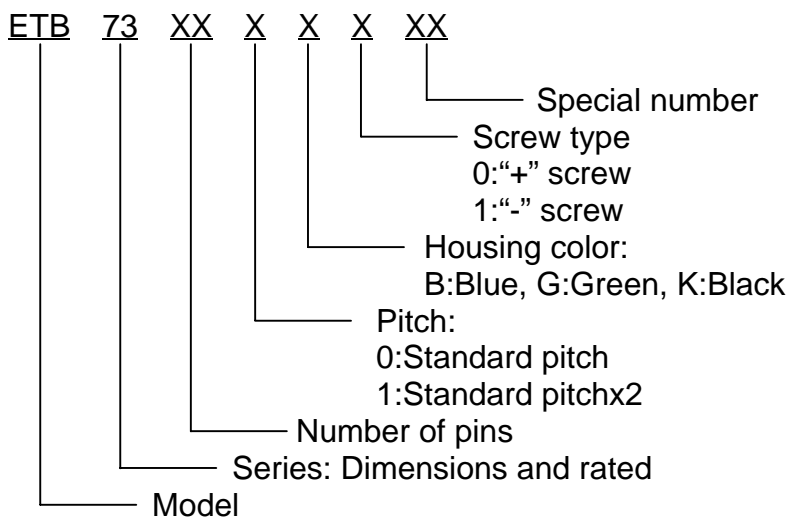

## DRAWING

DIMENSIONS UNIT:mm(inch)

ETB7302  
Pitch=9mm

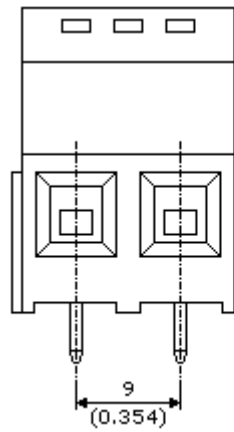

ETB7303  
Pitch=9mm

