


照明用电容器 Capacitor Designed for Lighting

50~60Hz

480V

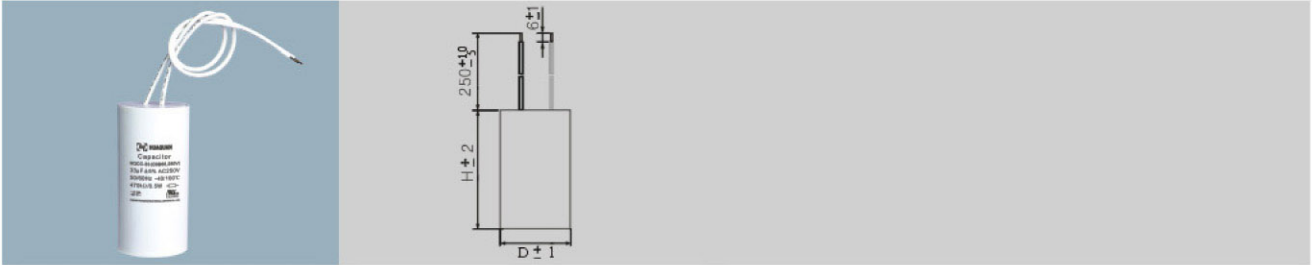

- Tc:100°C, 耐高温。
 - 灌封树脂, 性能稳定寿命长。
 - 内置放电电阻, 防止触电。
 - 绝缘材料: V0级。
 - 通过UL结构安全测试。获得UL认证。
 - 接线方式: 连接引出式(引线电容器)
-
- Good heat endurance, the case temperature can be as high as 100°C.
 - Epoxy resin as sealing material, stable performance and long life time.
 - Built-in discharging resistor to avoid electric shock.
 - Insulation materials: Grade V0.
 - UL-certified and UL performing configuration safety test passed..
 - Wiring mode: Capacitor with lead lines (Lead-line capacitor).

Tc:-40~100°C

型号 Model	产品代码 Codes	容量(uF) Capacitance	额定电压(V) Rated voltage	直径(mm) Diameter D	长度(mm) Length L	壳体温度t _c (°C) Case temp.
HQCC-2(CBB60,480V)	2341101201	2	480V 50/60Hz	26	52	≤ 100
HQCC-4(CBB60,480V)	2341102201	4	480V 50/60Hz	30	60	≤ 100
HQCC-6(CBB60,480V)	2341104201	6	480V 50/60Hz	36	70	≤ 100
HQCC-8(CBB60,480V)	2341106201	8	480V 50/60Hz	36	70	≤ 100
HQCC-10(CBB60,480V)	2341109201	10	480V 50/60Hz	45	75	≤ 100
HQCC-12(CBB60,480V)	2341111201	12	480V 50/60Hz	45	75	≤ 100
HQCC-18(CBB60,480V)	2341117201	18	480V 50/60Hz	50	92.5	≤ 100
HQCC-22(CBB60,480V)	2341121201	22	480V 50/60Hz	50	92.5	≤ 100
HQCC-23(CBB60,480V)	2341122201	23	480V 50/60Hz	50	92.5	≤ 100
HQCC-24(CBB60,480V)	2341123201	24	480V 50/60Hz	50	92.5	≤ 100
HQCC-25(CBB60,480V)	2341124201	25	480V 50/60Hz	50	92.5	≤ 100
HQCC-28(CBB60,480V)	2341126201	28	480V 50/60Hz	50	92.5	≤ 100
HQCC-32(CBB60,480V)	2341130201	32	480V 50/60Hz	50	120	≤ 100
HQCC-34(CBB60,480V)	2341132201	34	480V 50/60Hz	50	120	≤ 100
HQCC-35(CBB60,480V)	2341133201	35	480V 50/60Hz	50	120	≤ 100