

VA30S Series Glass Rotameter

VA30S glass rotameter are the new products of our company.compared with the other domestic products of the same type,it has advantages of high measuring precision, good interchangeability,multiple connection ways,especially the value of flow rate of the flow meter is in millimeter scale mark,which is capable of providing actual flow scale according to the temperature,presure,density, and viscosity of different flows, solving the problem of indication correction. As for the ways of connection. The loose flange structure is available, with both conventional type and


LZB-VA/FA30S玻璃转子流量计主要技术参数




口径(mm)	型号	测量范围		玻管长度 (mm)	工作温度	工作压力 (MPa)
		水L/h	空气m³/h			
15	VA30S-15 FA30S-15	4-40	0.12-1.2	300	-20℃ ~ 200℃	≤1.0
		6-60	0.3-3			
		10-100	0.5-5			
		16-160	0.8-8			
		25-250	1.2-12			
		40-400	2-20			
25	VA30S-25 FA30S-25	63-630	2-20			≤1.0
		100-1000	3-30			
		160-1600	5-50			
		250-2500	8-80			
40	VA30S-40 FA30S-40	160-1600	5-50			≤0.9
		250-2500	8-80			
		400-4000	12-120			
50	VA30S-50 FA30S-50	400-4000		≤0.7		
		630-6300	12-120			
		1000-10000	20-200			
		4000-16000	30-300			

LZB-VA/FA30S玻璃转子流量计外形尺寸

公称口径 (mm)	窗口尺寸 A×B	VA30S 管螺纹连接			FA30S 法兰连接			
		L1	C	D	L2	E	F	n-G
15	26x236	344	Φ38	G1/2"	348	Φ65	Φ95	4-Φ14
25	34x226	348	Φ55	G1½"	348	Φ85	Φ115	4-Φ14
40	44x226	370	Φ70	G1"	370	Φ110	Φ145	4-Φ18
50	60x216	380	Φ90	G2"	370	Φ125	Φ160	4-Φ18

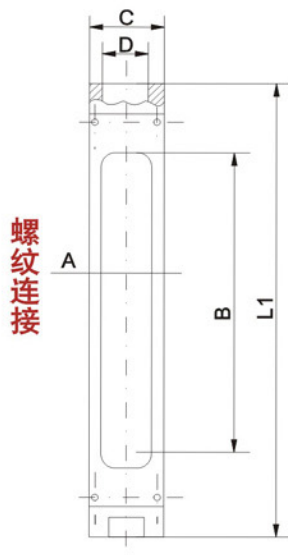

螺纹连接

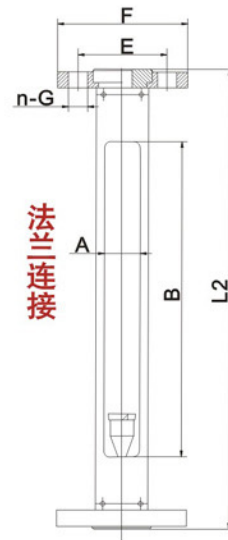

法兰连接