




- ★ **Compact package, includes connectors for ease of installation**
- ★ **Design for G.lite Application**
- ★ **100 mA DC Loop Current Capacity**


Specifications

POTS Port Impedance	600Ω	DC Resistance each line	25Ω Max
Insertion Loss @1004Hz	-0.5dB Max	Return Loss @300Hz~500Hz	-14 dB Min
Insertion Loss Distortion (dB)		@500Hz~2KHz	-18 dB Min
200Hz~4KHz	+/-1 dB	@2KHz~3.4KHz	-14 dB Min
3dB Cutoff Frequency	10KHz Typ	POTS Tip and Ring DC Voltage	0-105V
Attenuation @32 KHz~70 KHz	-30dB Min	Longitudinal Balance @200Hz~3K	-53 dB Min
@70KHz~600 KHz	-50dB Min		

Dimension

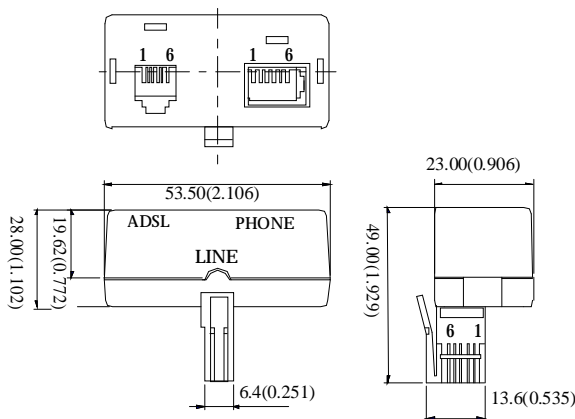

Schematic

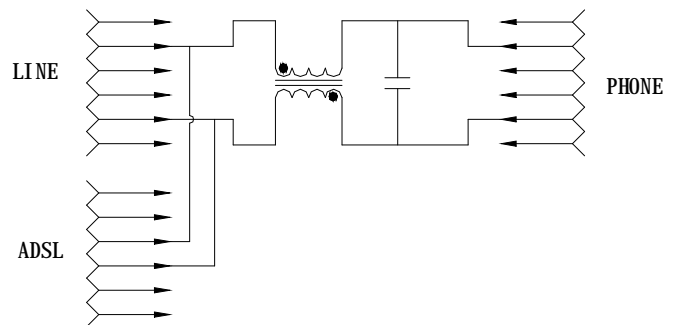

Connector	Function	Style	Tip	Ring
J1	Line	BT-M	Pin2	Pin5
J2	Phone	BT-F	Pin3	Pin4
J3	ADSL	RJ11	Pin2	Pin5

Data sheet subject to change without notice

Head Office & Factory 248-32 號 5F
Build-B, 5F, No. 248-32, Hsing-Shen Rd., Cheng-Jeng Dist.,
Lin-Kung Proc. Zone, Kaohsiung, Taiwan, R.O.C.
TEL:886-7-8153618 Fax:886-7-8150747

www.magcom.com.tw

PRELIMINARY

AMF03(07/2003) B