

Two Way-Tiger Bite Socket


Non-Slip Remove and Tight Function for damaged or corroded nuts

Item no.: S0013 (mm)

Item no.: S0014 (inch)



Sockets are hardened to a 45-48 HRC
Material:SCM 440

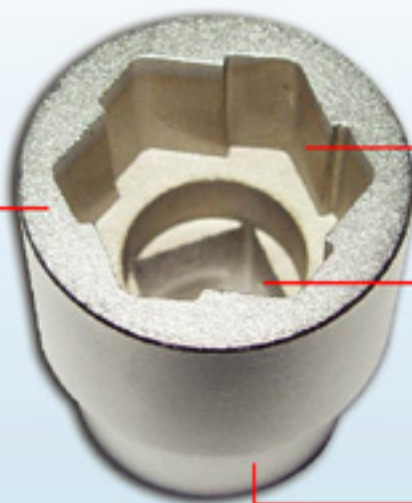

Six angle fluted and Tapered Internal splines

Knockout punch hole



- Tight, and remove any damaged nuts.
- Available use by hand tool and power tool with 3/8" DR.
- Compare with twist socket(old style) , twist socket has released function only.
- mm size : 8,9,10,11,12,13,14,15,16,17,19
- inch size : 5/16" , 3/8" , 7/16" , 1/2" , 9/16" , 5/8" , 11/16" , 3/4"



1. Stripped nuts are very difficult and time consuming to remove.



2. Ordinary sockets and wrenches just slip off and strip nuts even more.



3. Fluted and tapered internal splines are designed to match up with the perimeter of any damaged nut, bolt, etc.



4. Kits are available for us with 3/8" driver hand tool or power tool.



5. Sockets grab and do not let go. Position and tap lightly to establish initial gripping.



6. Sharp splines grip and hold the damaged item until remove or tight



Handy Twins International Co., Ltd.

1F., No.174, Lun Ping South Rd., Changhua 500, Taiwan R.O.C.

Tel:886-4-7517789(REP) Fax:886-4-7516999

E-mail:handy.twins@msa.hinet.net

http://www.handytwins.com