


HID电子镇流器

HID Electronic Ballast

120V~277V/50/60Hz

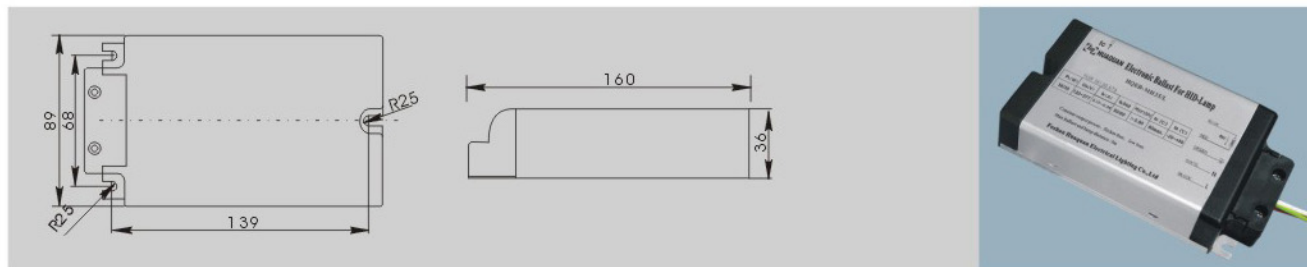

- 使用范围广，电源电压适用于120V~277V Ac，可在50~60Hz使用，极强的抗电压波动。低频载高频输出,解决电磁干扰,符合EMC要求。
- 无频闪,大大提高光质量，提高10% 以上的光效率，可适用于摄影等特殊要求使用。
- 节能可达30% 以上，大大延长光源寿命。
- 安全，配备多种保护功率，有短路、开路、过压、欠压、过流等保护。
- 耐高温 $t_c=80^{\circ}\text{C}$ ，可适应恶劣环境使用。
- 体积小，重量轻，噪声低，温升低，大大适应各种应用环境。安装简单、方便。
- 产品通过 UL 认证。

HID Electronic Ballast features:

- Wide range of applications;
- Supply voltage: 120V~277V ac, frequencies: 50/60Hz;
- Anti-voltage-fluctuation;
- A perfect solution to electromagnetic interferences by way of the high frequency output carrying on low frequency load,
- Meet EMC requirements ;
- No strobe lights;
- Improve light quality greatly, and enhance light efficiency by over 10%;
- Good for special applications like photography;
- Save a lot of energy over 30%, and extend the lamp service life greatly ;
- Many safety designs of short circuit, open circuit, over-voltage, lack-voltage and overflow protections;
- Good heat resistance performance under tough operating conditions with $T_c=80^{\circ}\text{C}$;
- Small size, light weight, low noise, low temperature rise, suitable for a variety of applications;
- Easy to install and convenient to maintain;
- UL-certified.

AC: 120~277V 50/60Hz $T_c:80^{\circ}\text{C}$

Ballast										Lamp
型号 Model	产品代码 Code	λ	输入电流 $I_n(\text{A})$	灯电流波峰比 LCCF	电流总谐波 THDI%	$T_a(^{\circ}\text{C})$	数量/箱(个) Quantity/carton (pcs)	重量/箱(公斤) Weight/carton (kg)	包装尺寸 Dimensions (mm)	配灯 Lamp
HQEB-MH175/L	2170910211	>0.95	0.83	1.3	9	-20~+50	24	12.0	380x215x275	175W MH
HQEB-150/L	2170909211	>0.95	0.71	1.3	9	-20~+50	24	12.0	380x215x275	150W MH/HPS
HQEB-100/L	2170906211	>0.95	0.48	1.3	9	-20~+50	24	12.0	380x215x275	100W MH/HPS
HQEB-70/L	2170904211	>0.95	0.35	1.3	9	-20~+50	24	10.4	380x215x275	70W MH/HPS
HQEB-50/L	2170903211	>0.95	0.23	1.3	9	-20~+50	24	10.4	380x215x275	50W MH/HPS
HQEB-MH35/L	2170902202	>0.95	0.19	1.5	10	-20~+50	24	10.4	380x215x275	35W MH
HQEB-MH20/L	2170901202	>0.95	0.09	1.5	10	-20~+50	24	10.4	380x215x275	20W MH