T/NO.	T1:168		
	T2:363	T3:134	

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

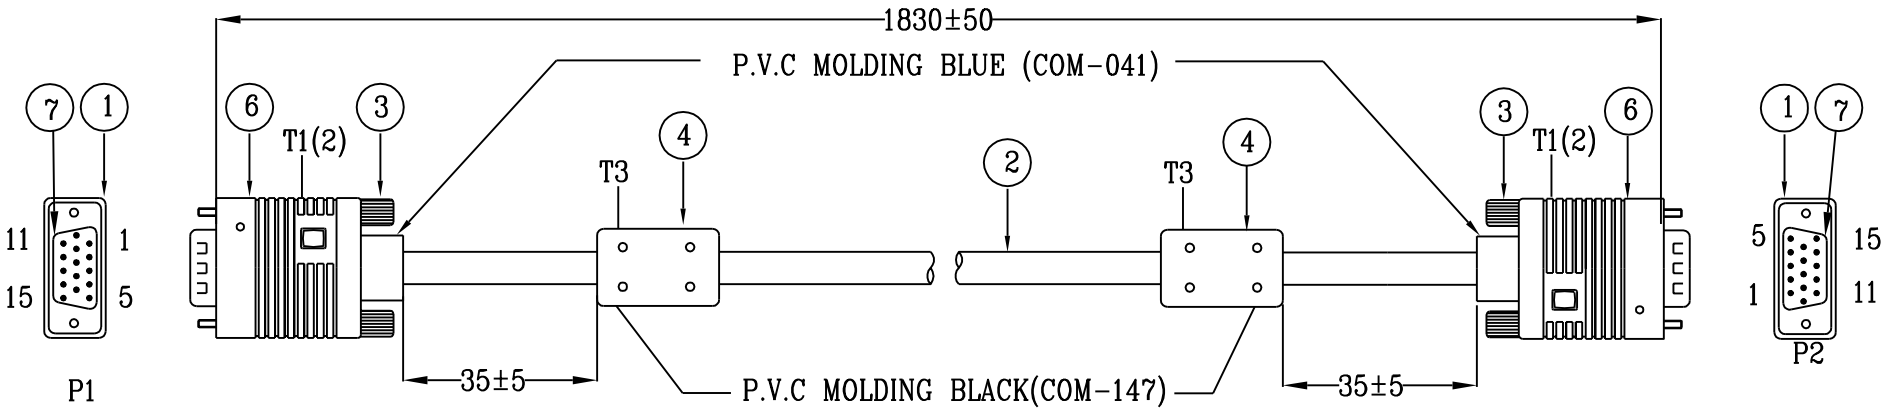

WIRE LIST

P1	WIRE COLOR	P2
1	RED COAXIAL	1
2	GRAY COAXIAL	2
3	BLUE COAXIAL	3
4	JUMP WIRE	4
5	BLACK	5
6	RED COAXIAL SHIELD	6
7	GRAY COAXIAL SHIELD	7
8	BLUE COAXIAL SHIELD	8
9	BLUE	9
10	JUMP WIRE	10
11	JUMP WIRE	11
12	ORANGE	12
13	GREEN	13
14	RED	14
15	PURPLE	15
CASE	BRAID SHIELD	CASE

SPECIFICATION	Q'TY
1. HDD CONN: 15P(3*5)MALE BLACK SOLDER GOLD FLASH	2
2. CABLE: UL20276.CSA OR CUL 3COAX(PVC JACKET)*30AWG+6C*30AWG+ AEB(16*9*0.12)P.V.C JACKET:BLACK (COM-147) SOFT OD=6.3+/-0.2mm L=1800+/-10mm	1
3. SCREW: #4-40 UNC A.B.S MOLDING BLUE(COM-041) L=49.6mm	2
4. CORE: ø14.2*ø7.2*28.5mm URITE F5BRH OR EQU	1
5. SCREW: #4-40 UNC A.B.S MOLDING BLUE (COM-041) L=33.8mm	2
6. Tinplate:Two types, OD=7.0MM YUSHEN P/N:DY05000	2SET
7. DUST CAP:FOR HD-SUB 15P Transparent	2

Comlink ELECTRONICS CO.LTD S.

DRAWN BY	Zhiyu.yu	DATE	06-6-19
CHECKED BY		DATE	
APPROVED BY		DATE	

TITLE: HDB15P TO HDB15P CABLE ASSEMBLY

PART NUMBER

DRAWING NUMBER | REV. A0

TOLERANCES UNLESS NOTED: X. ±0.15, X.X ±0.10, X.XX ±0.05

PROJECTION:

UNITS: mm

SCALE: NONE

SIZE: A4

SHEET: 1/1