


# Pasmiko®

MAINTENANCE-FREE RECHARGEABLE BATTERY

VALVE-REGULATED LEAD-ACID BATTERY(LEAD-CALCIUM)

CP26-12

12V 26AH

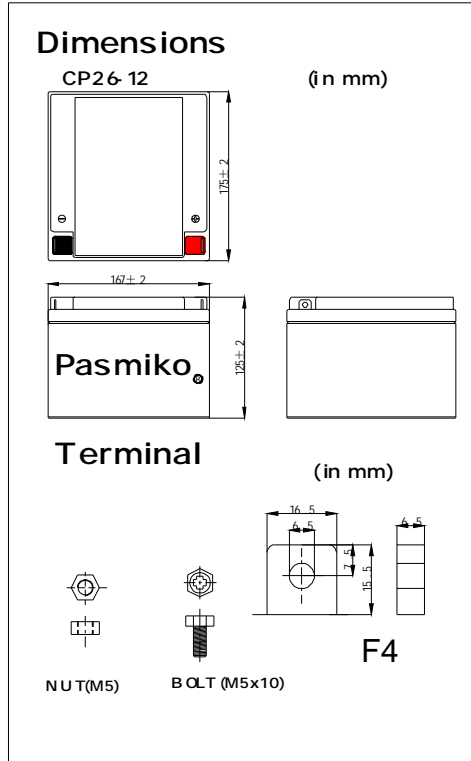

## SPECIFICATION

Container height	:	125mm(4.9inch)
Length	:	167mm(6.57inch)
Width	:	175mm(6.89inch)
Weight	:	approximate 895g
Internal resistance	:	approximate 9mΩ
Container material	:	flame retardant A.B.S

## CHARACTERISTIC

Nominal voltage	:	12V
20hour rate (13A to 10.5V)	:	26AH
10hour rate (2.47A to 10.5V)	:	24.7AH
5hour rate (4.42A to 10.2V)	:	22.1AH
3hour rate (6.5A to 10.2V)	:	19.5AH
1hour rate (15.6A to 9.3V)	:	15.6AH
1C (26A to 7.8V)	:	12.2AH
2C (52A to 7.8V)	:	11.2AH
3C (78A to 7.8V)	:	10.4AH
Max discharge current	:	390A(5sec)

## DISCHARGE CAPACITY UNDER DIFFERENT TEMPERATURES

40°C	:	102%
25°C	:	100%
0°C	:	85%

## CHARGING Methods at (25°C, 77°F)

Standby use	:	13.5V~138V
Cycle use	:	144V~15.5V
Max charging current	:	7.2A

## SELF-DISCHARGE RESIDUAL CAPACITY (25°C, 77°F)

After 6 months	:	90%
	:	82%
After 12 months	:	70%

## ENDURANCE in CYCLES

Cycle use			
50% depth of discharge	:	250	cycles
30% depth of discharge	:	1100	cycles
Standby use	:	3-5	years

Discharge time vs. discharge current (25°C, 77°F)

