

Desk Top Adaptor

15~24 Watts

SPU24 Series - Single Output

FEATURES

Output Voltage Available From 5VDC thru 48VDC
Optional Output Connector

Splash Proof
2 Years Warranty



SPECIFICATIONS

Input Voltage.....	90VAC~264VAC
Inrush Current.....	15A at 115VAC/30A at 230VAC
Dielectric Withstand.....	Input/Output 4242VDC
Efficiency.....	75% Typ.
Hold Up Time.....	5mS at Nominal Line
Line Regulation.....	± 1%
Load Regulation.....	± 5%
Ripple & Noise.....	1% p-p max.
Operating Temperature.....	0 to +70°C (Derated 2.5% / °C from +50°C to +70°C)
Storage Temperature.....	-40 to +85°C
Protections.....	OCP , OVP
Safety	UL, CUL, TUV, CB Approved CE Mark
EMI.....	Meet FCC Class "B"

MODEL LIST




Model Number	Output Voltage	Output Current	Total Regulation	Maximum Output Power
SPU24-102	5~6VDC	3.00~2.5A	± 5%	15W
SPU24-103	6~8VDC	3.30~2.5A	± 5%	20W
SPU24-104	8~11VDC	2.75~2.00A	± 5%	22W
SPU24-105	11~13VDC	2.18~1.85A	± 5%	24W
SPU24-106	13~16VDC	1.85~1.50A	± 5%	24W
SPU24-107	16~21VDC	1.50~1.14A	± 5%	24W
SPU24-108	21~27VDC	1.14~0.89A	± 5%	24W
SPU24-109	27~33VDC	0.89~0.72A	± 5%	24W
SPU24-110	33~40VDC	0.73~0.60A	± 5%	24W
SPU24-111	48VDC	0.50A	± 5%	24W

**Please specify output voltage when ordering.

Ordering info.: Example SPU24-105 / 12
Part No Vout= 12V

Mechanical Drawing (mm)

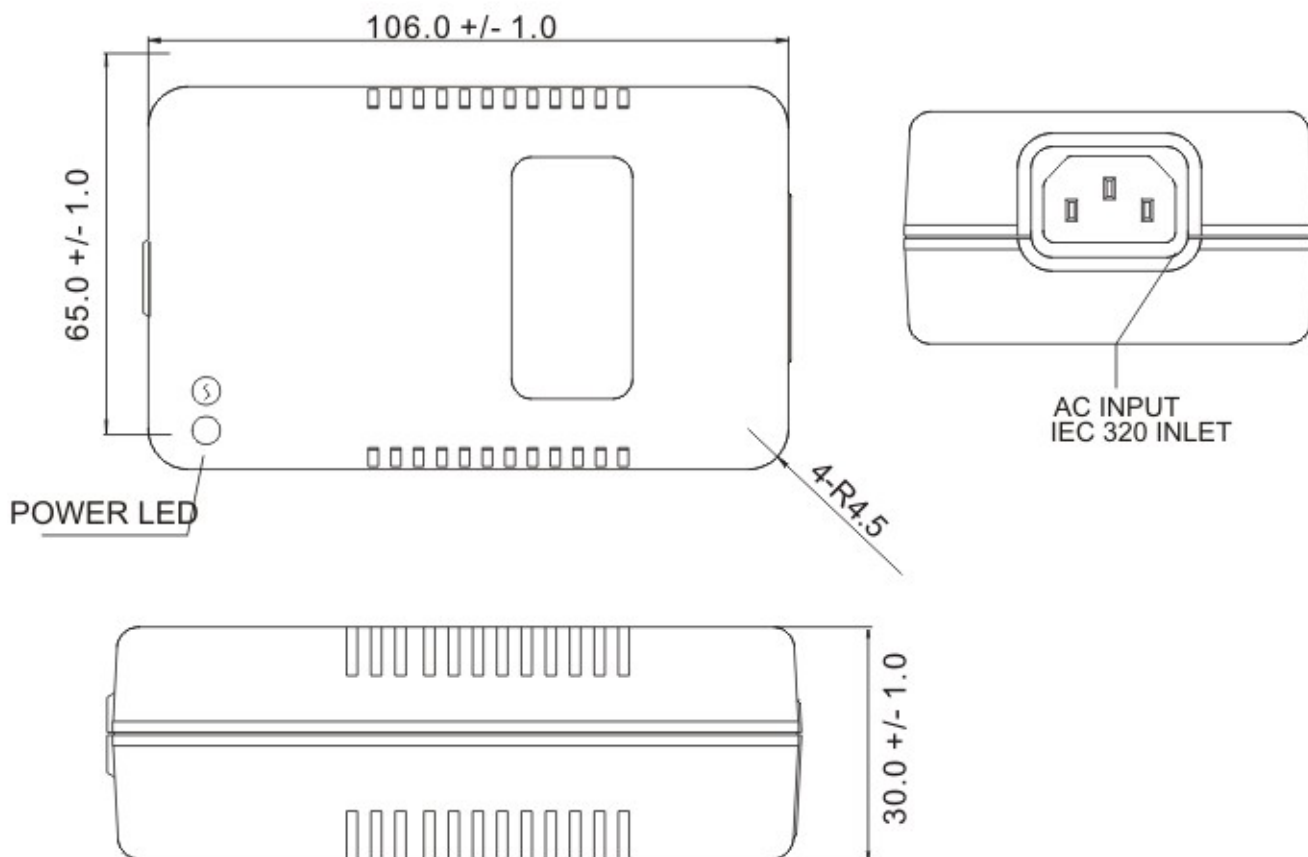

Desk Top Adaptor