


- ★ Compact package, includes connectors and Plug for ease of installation
- ★ Design for G.lite Application
- ★ 100 mA DC Loop Current Capacity


### Specifications

POTS Port Impedance	600Ω	DC Resistance each line	7.5Ω Max
Insertion Loss @1004KHz	-1dB Max	Return Loss @ERL	6 dB Min
3dB Cutoff Frequency	10KHz Typ	@SRLl	5 dB Min
Attenuation @25 KHz	-25dB Min	@SRLH	3 dB Min
@30KHz	-30dB Min		
In Band Ripple	1dB Max		
Longitudinal Balance @200Hz~3K	-53 dB Min		
POTS Tip and Ring DC Voltage	0-105V		

### Dimension

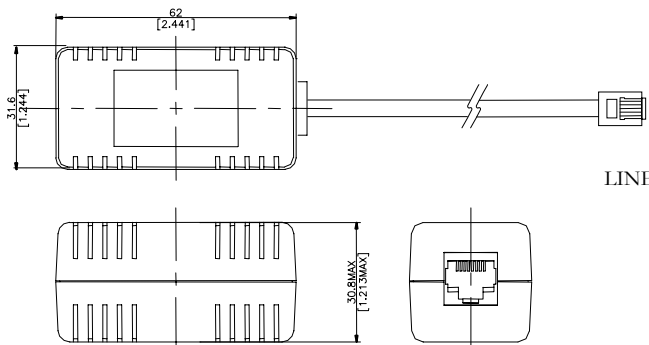

### Schematic

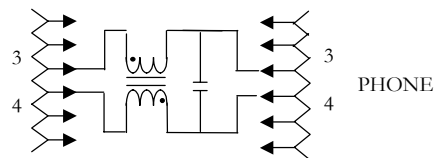

Connector	Function	Style	Tip	Ring
J1	Line	RJ11 Plug	Pin3	Pin4
J2	Phone	RJ11 Jack	Pin3	Pin4

Data sheet subject to change without notice