




Performance Curve

Voltage : 36.0 Vdc

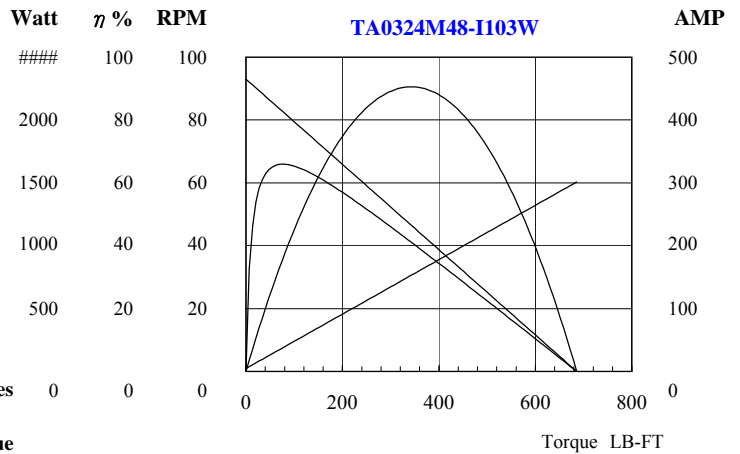

Features

- Complete system with motor, brake, harness and connector
- Heavy duty aluminum die-cast housing
- Neoprene vibration absorption sleeves
- Operates in both directions


Option

- 18" ~ 22.5" wheel bases
- Parking brake with up to 8Nm static torque
- Custom designed performance with motor diameter from 4.0" up to 4.8"
- Custom designed shafts and wheel flanges

Applications

- Extra heavy duty scooter
- Walk-behind floor polisher
- Golf cart
- Material handling cart

Dimensions Inch[mm]

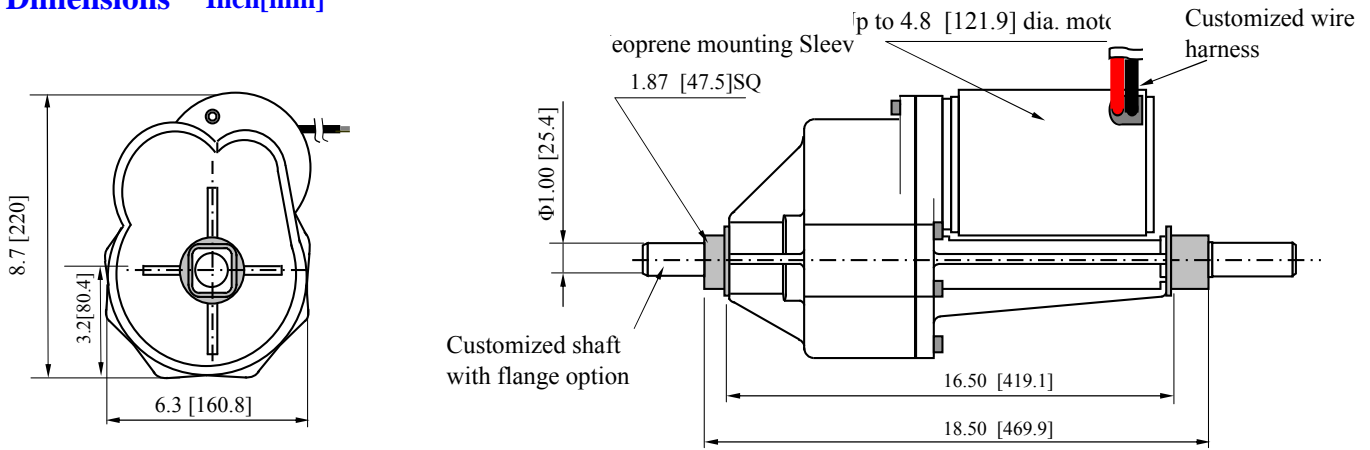

Selected Performance Data

Model	Application	Voltage		No Load			At maximum efficiency				Stall		Motor Dia.	
		Vdc	Rated Voltage Vdc	Speed RPM	Current A	Torque LB-FT	Speed RPM	Current A	Output Watt	Effc'y %	Torque LB-FT	Current A	Inch	mm
TA0324M48-I103W	Floor Polisher	32-40	36.0	91	3	64	81	25.3	736.0	80%	650	230.0	4.8	121.9

Email: cimsales@cclmotors.com

North America: 30 Technology Drive, Warren, New Jersey 07059 USA

Hong Kong: 4/F, No. 6, On Lok Mun St., On Lok Tsuen, Fanling, Hong Kong

Website: www.cimmotor.com

Tel: (908) 753 710(Fax: (908) 753 9100

Tel: (852) 3125 00(Fax: (852) 3125 0122