




## Performance Curve

Voltage : 24.0 Vdc

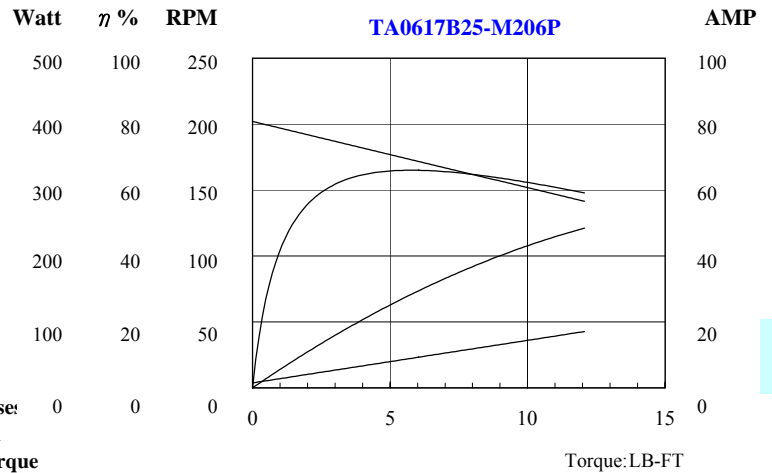

### ■ Features

- Complete system with motor,brake,harness and connector
- Heavy duty aluminum die-cast housing
- Neoprene vibration absorption sleeves
- Operates in both directions


### ■ Options

- 12" ~ 14" wheel base
- Parking brake with up to 6Nm static torque
- Custom designed performance with motor diameter from 2.5" up to 3.0"
- Custom designed shafts and wheel flanges

### ■ Application

- Light duty scooter

## Dimensions Inch[mm]

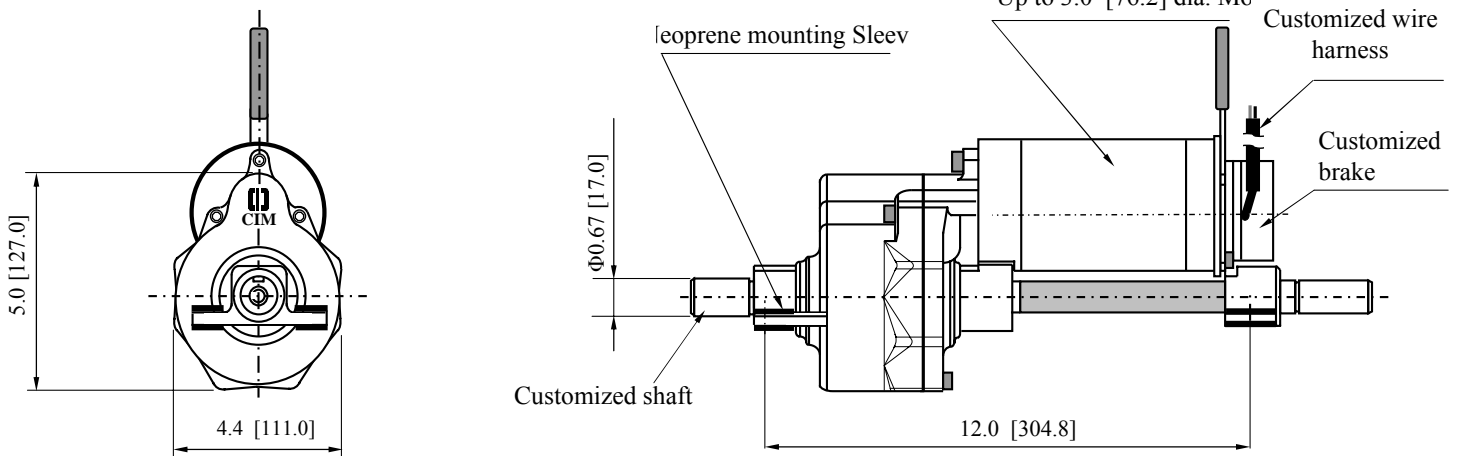

## Selected Performance Data

Model	Application	Voltage		Rated Voltage	No Load		At maximum efficiency				Stall		Motor Dia.		
		Vdc	Vdc		Speed RPM	Current A	Torque LB-FT	Speed RPM	Current A	Output Watt	Effc'y %	Torque LB-FT	Current A	Inch	mm
TA0617B30-M106E	Scooter	20-28	24.0	24.0	180	1.9	7.8	158	11.9	175.2	61%	55.8	73.0	3.0	76.2
TA0617B25-M206P	Scooter	20-28	24.0	24.0	202	1.5	5.6	174	8.7	137.8	66%	39.9	52.9	2.5	63.5
TA0617B30-M206AA	Scooter	20-28	24.0	24.0	213	1.4	7.7	192	12.5	210.0	70%	77.0	112.6	3.0	76.2

Email: [cimsales@cclmotors.com](mailto:cimsales@cclmotors.com)

North America: 30 Technology Drive, Warren, New Jersey 07059 USA

Hong Kong: 4/F, No. 6, On Lok Mun St., On Lok Tsuen, Fanling, Hong Kong

Website: [www.cimmotor.com](http://www.cimmotor.com)

Tel: (908) 753 7100 Fax: (908) 753 9100

Tel: (852) 3125 000 Fax: (852) 3125 0122