




Performance Curve

Voltage : 24.0 Vdc

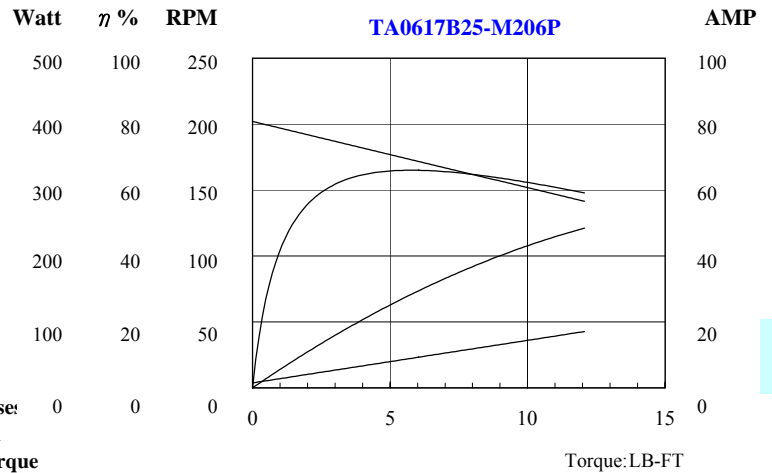

■ Features

- Complete system with motor,brake,harness and connector
- Heavy duty aluminum die-cast housing
- Neoprene vibration absorption sleeves
- Operates in both directions



■ Options

- 12" ~ 14" wheel base
- Parking brake with up to 6Nm static torque
- Custom designed performance with motor diameter from 2.5" up to 3.0"
- Custom designed shafts and wheel flanges

■ Application

- Light duty scooter

Dimensions Inch[mm]

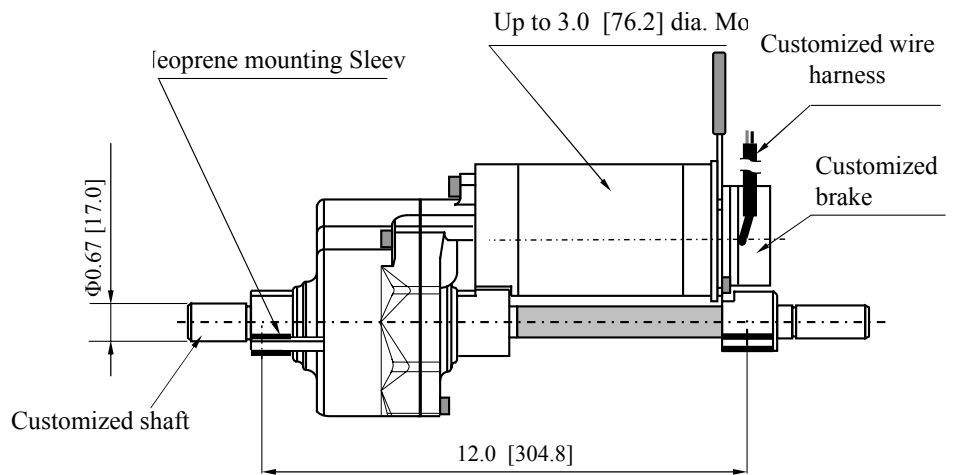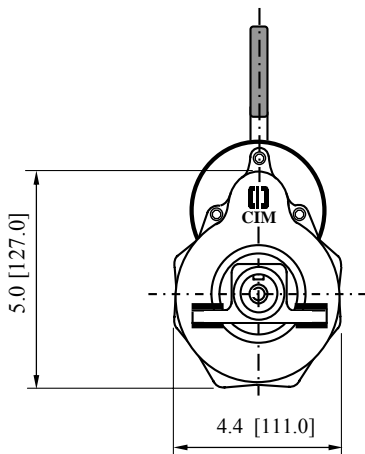

Selected Performance Data

| Model | Application | Voltage | | Rated Voltage | No Load | | At maximum efficiency | | | | | Stall | | Motor Dia. | |
|------------------|-------------|---------|------|---------------|-----------|-----------|-----------------------|-----------|-----------|-------------|----------|--------------|-----------|------------|------|
| | | Vdc | Vdc | | Speed RPM | Current A | Torque LB-FT | Speed RPM | Current A | Output Watt | Effc'y % | Torque LB-FT | Current A | Inch | mm |
| TA0617B30-M106E | Scooter | 20-28 | 24.0 | 24.0 | 180 | 1.9 | 7.8 | 158 | 11.9 | 175.2 | 61% | 55.8 | 73.0 | 3.0 | 76.2 |
| TA0617B25-M206P | Scooter | 20-28 | 24.0 | 24.0 | 202 | 1.5 | 5.6 | 174 | 8.7 | 137.8 | 66% | 39.9 | 52.9 | 2.5 | 63.5 |
| TA0617B30-M206AA | Scooter | 20-28 | 24.0 | 24.0 | 213 | 1.4 | 7.7 | 192 | 12.5 | 210.0 | 70% | 77.0 | 112.6 | 3.0 | 76.2 |

Email: cimsales@cclmotors.com

North America: 30 Technology Drive, Warren, New Jersey 07059 USA

Hong Kong: 4/F, No. 6, On Lok Mun St., On Lok Tsuen, Fanling, Hong Kong

Website: www.cimmotor.com

Tel: (908) 753 7100 Fax: (908) 753 9100

Tel: (852) 3125 000 Fax: (852) 3125 0122